


- 1 = White/Orange (+ TX)
2 = White/Green (+ RX)
3 = Orange (- TX)
4 = Green (- RX)

| REVISIONS | | | |
|-----------|---------------|----------|----------|
| REV. | DESCRIPTION | DATE | APPROVED |
| A | REDRAWN IN SW | 9/2/2008 | |

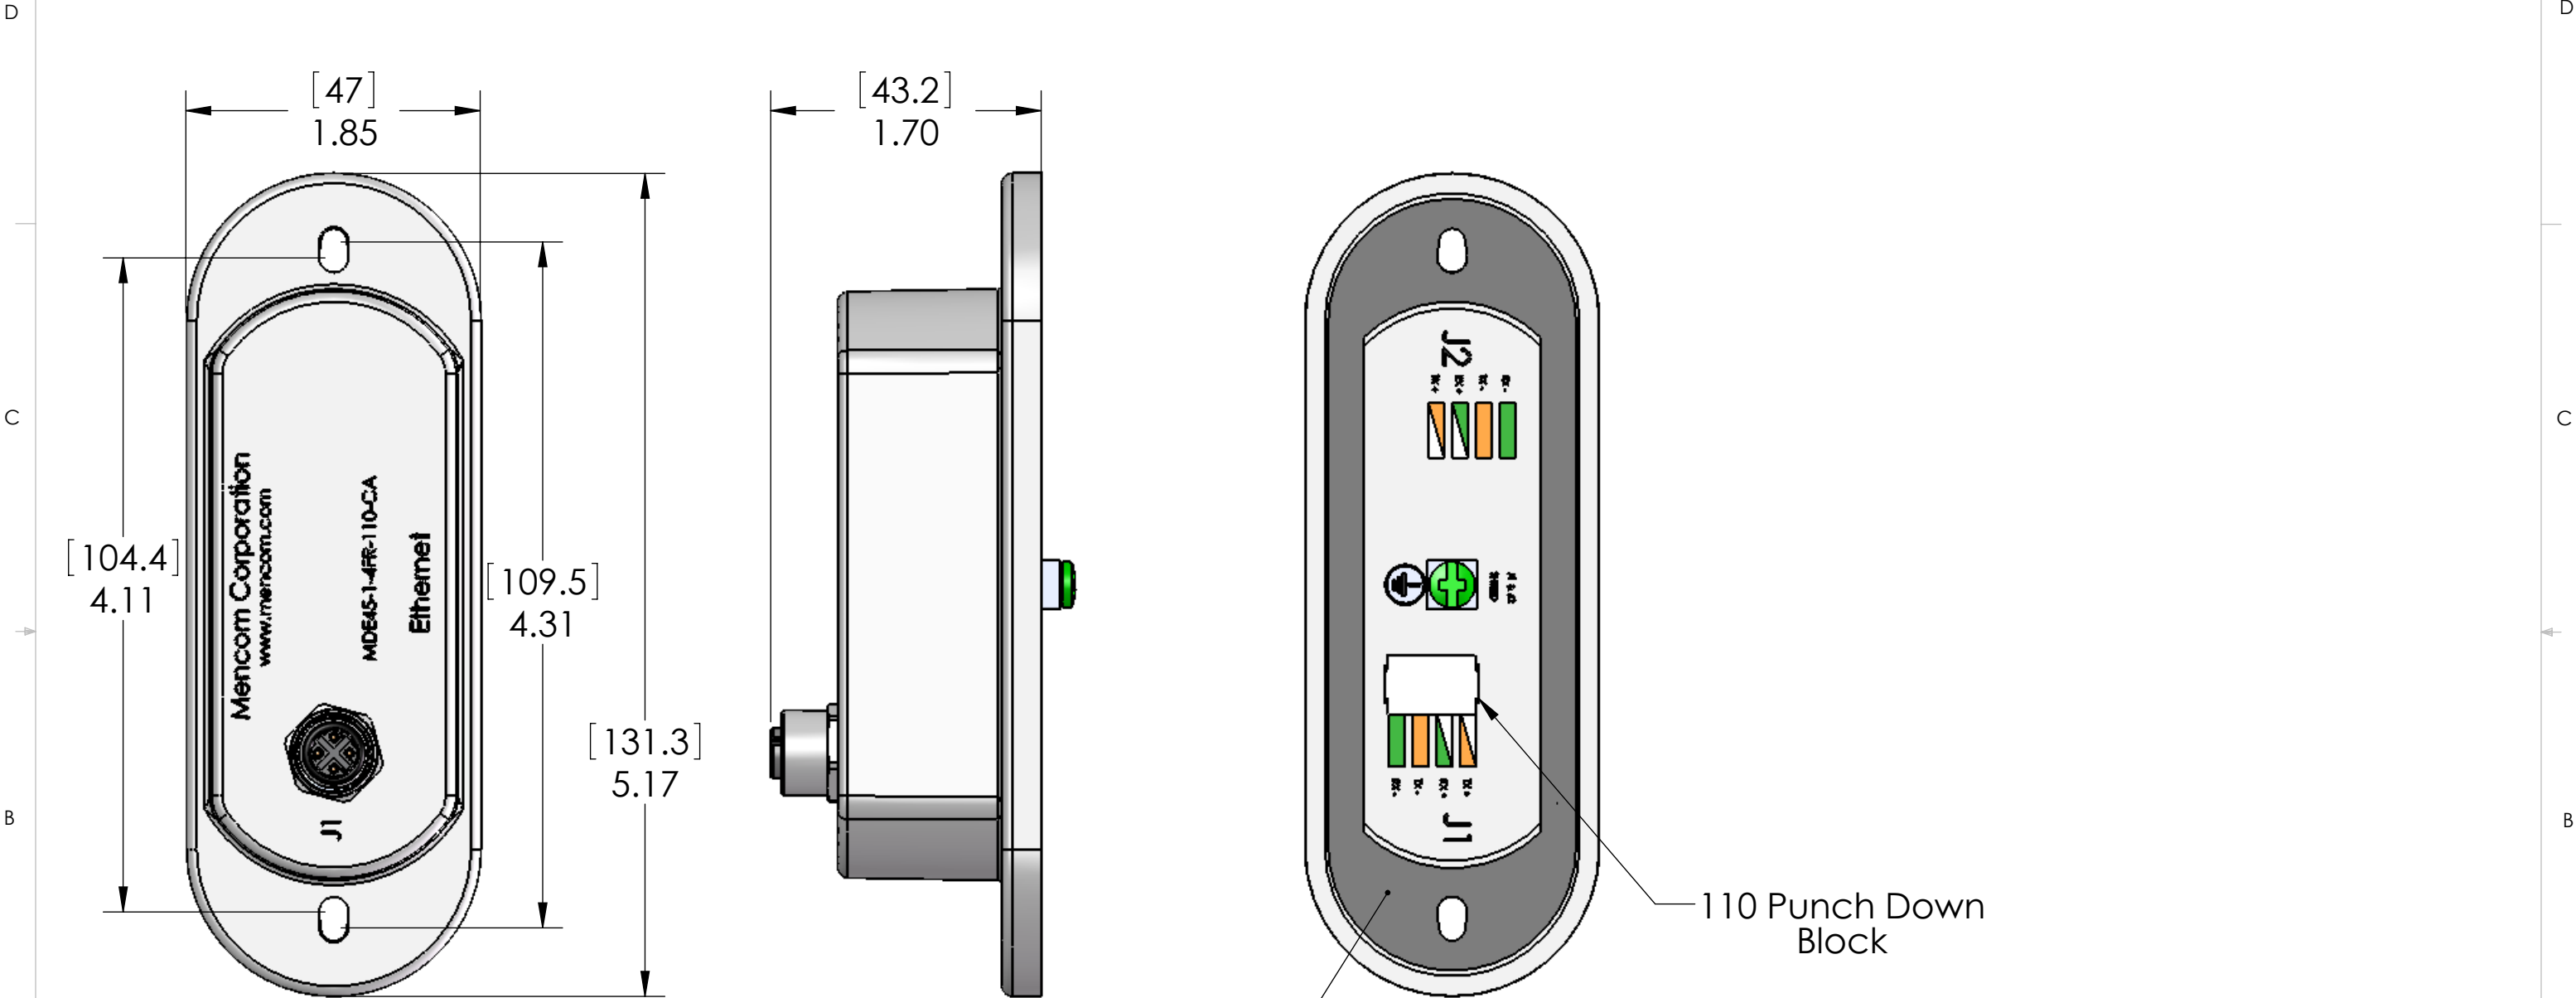

Included:

- 2 each 10-24 screws (for Form8 conduit bodies)
- 2 each 8-32 screws (for Mark 9 conduit bodies)

Can be mounted to 3/4" Form 8, Mark 9 and standard conduit bodies.

| SPECIFICATIONS: | |
|-----------------------|--------------------------|
| HOUSING MATERIAL | GLASS FILLED PBT |
| RECEPTACLE HOUSING: | ANODIZED ALUMINUM |
| RECEPTACLE INSERT: | YELLOW PVC |
| RECEPTACLE CONTACTS: | GOLD PLATED COPPER ALLOY |
| OPERATING VOLTAGE: | 40V |
| OPERATING CURRENT: | 4A |
| OPERATING TEMPERATURE | -40°C - +70°C |

SEALING GASKET

110 Punch Down Block

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

| | | | | | | | |
|--|--|-----------------------------------|-----------|------|--------------------|--------------------|--------------|
| | | UNLESS OTHERWISE SPECIFIED: | | NAME | MENCOM CORPORATION | | |
| | | DIMENSIONS ARE IN INCHES AND [MM] | DRAWN | BEM | | | |
| | | | CHECKED | | | | |
| | | | ENG APPR. | | | | |
| | | | MFG APPR. | | | | |
| | | | Q.A. | | | | |
| | | MATERIAL | COMMENTS: | | SIZE | DWG. NO. | REV |
| | | FINISH | | | B | MDE45-1-4FR-110-CA | A |
| | | DO NOT SCALE DRAWING | | | SCALE: 1:1 | WEIGHT: | SHEET 1 OF 1 |

REV
A