


- 1 = White/Orange (+ TX)
- 2 = White/Green (+ RX)
- 3 = Orange (- TX)
- 4 = Green (- RX)

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	9/2/2008	

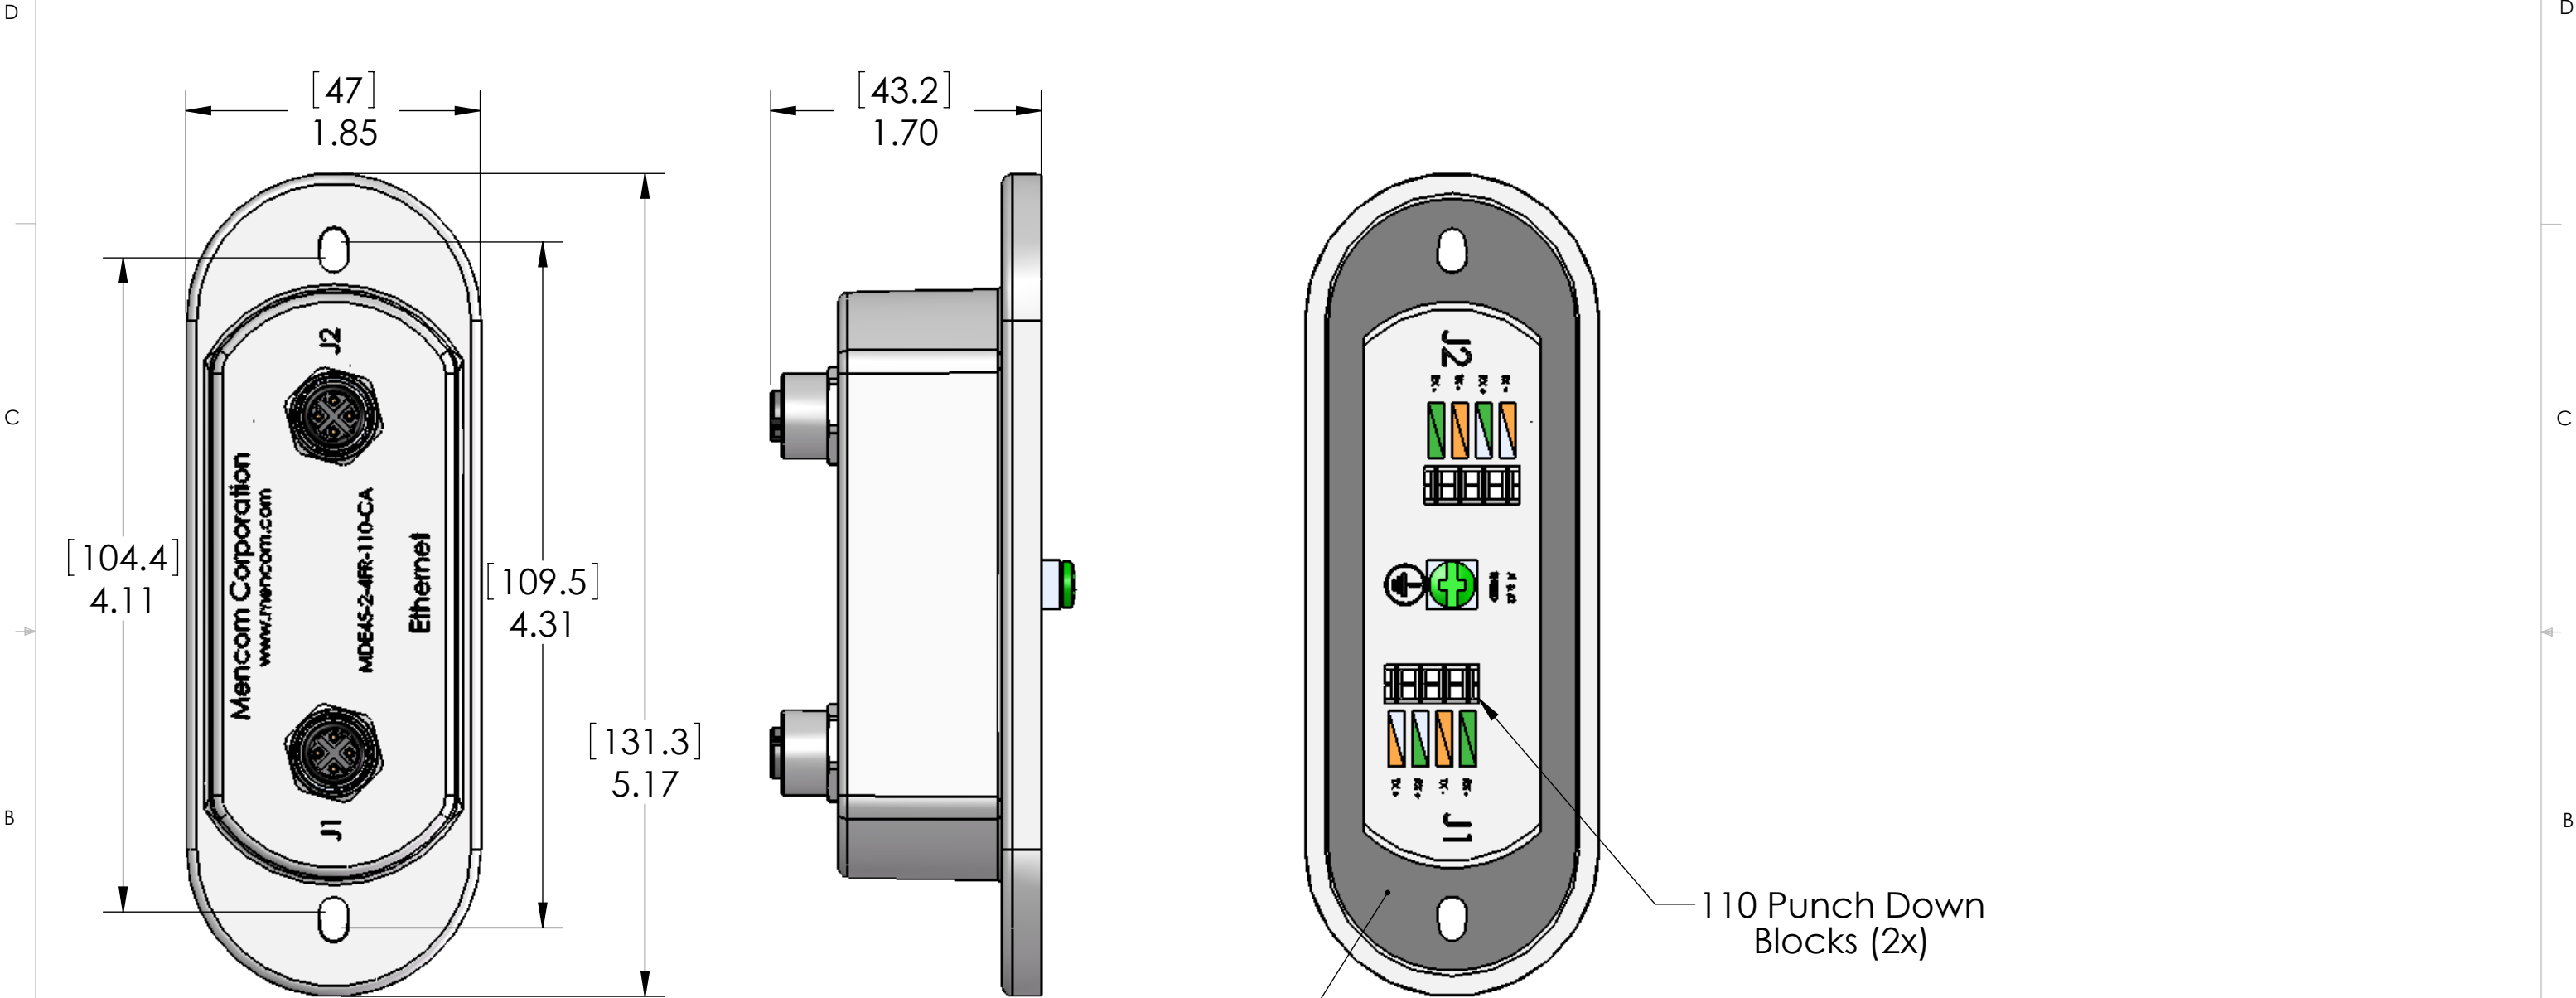

Included:

- 2 each 10-24 screws (for Form8 conduit bodies)
- 2 each 8-32 screws (for Mark 9 conduit bodies)

Can be mounted to 3/4" Form 8, Mark 9 and standard conduit bodies.

SPECIFICATIONS:	
HOUSING MATERIAL	GLASS FILLED PBT
RECEPTACLE HOUSING:	ANODIZED ALUMINUM
RECEPTACLE INSERT:	YELLOW PVC
RECEPTACLE CONTACTS:	GOLD PLATED COPPER ALLOY
OPERATING VOLTAGE:	40V
OPERATING CURRENT:	4A
OPERATING TEMPERATURE	-40°C - +70°C

SEALING GASKET

110 Punch Down Blocks (2x)

**PROPRIETARY AND CONFIDENTIAL**  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:  DIMENSIONS ARE IN INCHES AND [MM]		NAME	MENCOM CORPORATION	
		DRAWN		
		CHECKED		
		ENG APPR.		
		MFG APPR.		
MATERIAL		Q.A.	TITLE:	
FINISH		COMMENTS:		
DO NOT SCALE DRAWING		SIZE	DWG. NO.	REV
		<b>B</b>	<b>MDE45-2-4FR-110-CA</b>	<b>A</b>
		SCALE: 1:1	WEIGHT:	SHEET 1 OF 1