


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	9/2/2008	

NOTE: Some Profibus cables have a brown wire instead of orange, and some have no ground wire

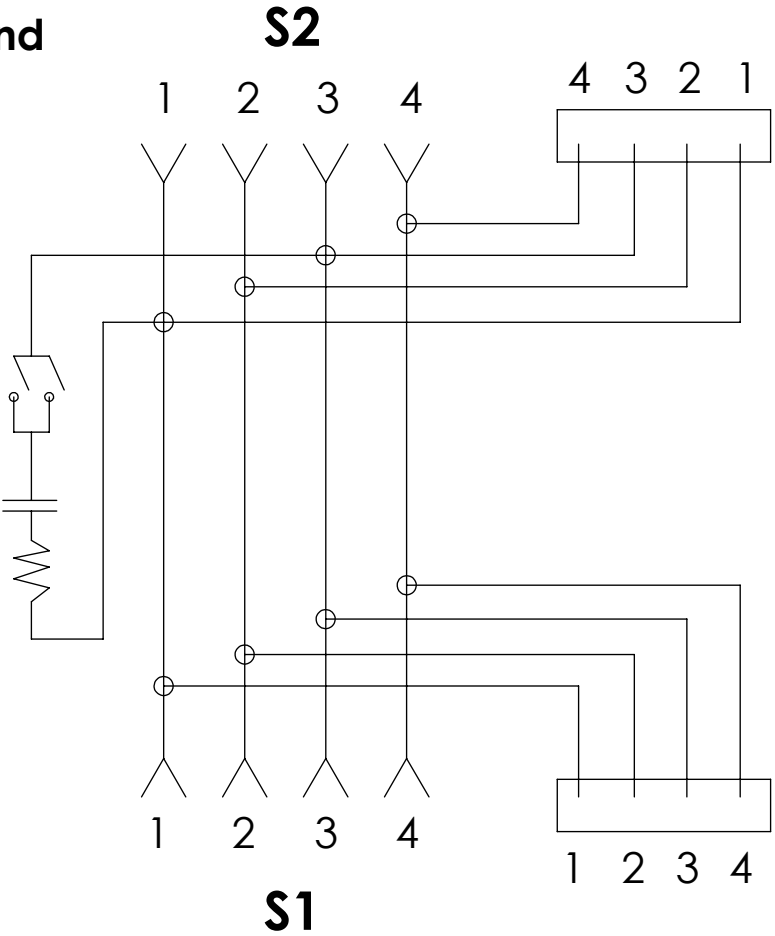

Sealing Gasket

Terminal Block Plugs included (2x)

Included:
2 each 10-24 screws (for Form 8 conduit bodies)
2 each 8-32 screws (for Mark 9 conduit bodies)

This part is for use on Form 8, Mark 9 and Standard 3/4" conduit bodies

SPECIFICATIONS:	
HOUSING MATERIAL	GLASS FILLED PBT
RECEPTACLE HOUSING:	ANODIZED ALUMINUM
RECEPTACLE INSERT:	BLACK PVC
RECEPTACLE CONTACTS:	GOLD PLATED COPPER ALLOY
OPERATING VOLTAGE:	300V
OPERATING CURRENT:	9A
OPERATING TEMPERATURE	-40°C - +70°C

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

		UNLESS OTHERWISE SPECIFIED:		NAME	MENCOM CORPORATION		
		DIMENSIONS ARE IN INCHES AND [MM]	DRAWN	BEM	TITLE:		
			CHECKED				
			ENG APPR.				
			MFG APPR.				
			Q.A.				
		MATERIAL	COMMENTS:		SIZE	DWG. NO.	REV
		FINISH			B	PBIN-2-4FR-CA	A
		DO NOT SCALE DRAWING			SCALE: 1:1	WEIGHT:	SHEET 1 OF 1