


18-3 Unshielded Non-Plenum

UL listed for guaranteed performance

Part No.: 183TH

Applications:

This document establishes the specifications for a three conductor unshielded non-plenum cable used for power limited applications.



Construction Details:

Number of Conductors: 3/C
 Conductor: 18AWG Solid Bare Copper.
 Insulation material: Polyvinyl Chloride.
 Color code: Red, White, Green
 Jacket material: Polyvinyl Chloride
 Jacket Color: UV Resistant Brown
 Nominal Diameter: 0.150 in.

Standards:

- National Electric Code—Article 725
- UL Subject 13, Type CL2

Electricals:

Suggested Working Voltage: Voltage Not Specified

Codes & Listings:


- UL or ETL

Technical Details:

Temperature Rating	Operation	-20°C to +60°C
Nominal Weight:	21 lbs. / 1,000 ft.	

Preparation for Shipment:

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.

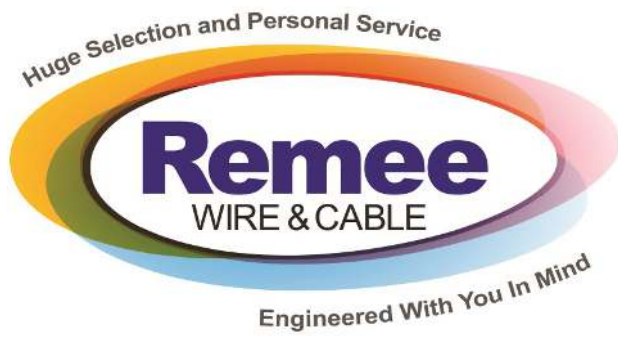

18-3 Unshielded Non-Plenum

UL listed for guaranteed performance

Part No.: 183TH

Note: While Remeo Products Corp. has made every reasonable effort to ensure the accuracy of the information in this document, Remeo Products Corp. does not guarantee that it is error-free, nor does Remeo Products Corp. make any other representation, warranty, or guarantee that the information is accurate, correct, reliable or current. Remeo Products Corp. reserves the right to make any adjustments to the information contained herein at any time without notice. Remeo Products Corp. expressly disclaims all implied warranties regarding the information contained herein, including but not limited to, any implied warranties of merchantability or fitness for particular purpose. The dimensions in this document are for reference purposes only and are subject to change without notice.