

# 18-4 Unshielded Non-Plenum

UL listed for guaranteed performance

Part No.: 184TH

## Applications:

This document establishes the specifications for a four conductor unshielded non-plenum cable used for power limited applications.

## Construction Details:


Number of Conductors: 4/C  
 Conductor: 18AWG Solid Bare Copper.  
 Insulation material: Polyvinyl Chloride.  
 Color code: Red, White, Green, Blue  
 Jacket material: Polyvinyl Chloride  
 Jacket Color: UV Resistant Brown  
 Nominal Diameter: 0.167 in.

## Electricals:

Suggested Working Voltage: Voltage Not Specified

## Technical Details:

Temperature Rating	Operation	-20°C to +60°C
Nominal Weight:	26 lbs. / 1,000 ft.	

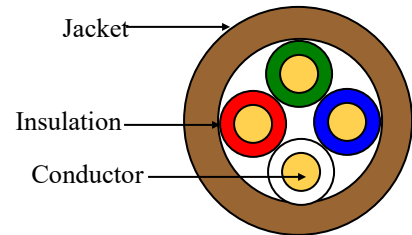

## Standards:


- National Electric Code—Article 725
- UL Subject 13, Type CL2

## Codes & Listings:

- UL or ETL

## Preparation for Shipment:

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.

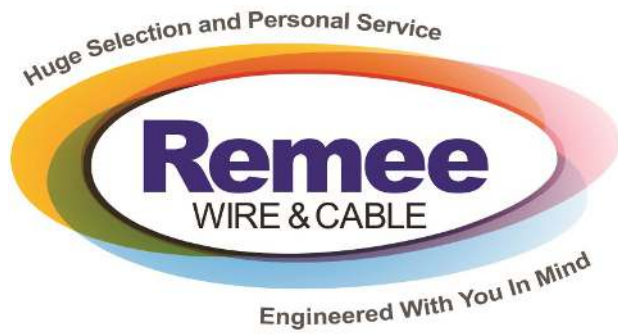

# 18-4 Unshielded Non-Plenum

UL listed for guaranteed performance

Part No.: 184TH

**Note:** While Remeewire Products Corp. has made every reasonable effort to ensure the accuracy of the information in this document, Remeewire Products Corp. does not guarantee that it is error-free, nor does Remeewire Products Corp. make any other representation, warranty, or guarantee that the information is accurate, correct, reliable or current. Remeewire Products Corp. reserves the right to make any adjustments to the information contained herein at any time without notice. Remeewire Products Corp. expressly disclaims all implied warranties regarding the information contained herein, including but not limited to, any implied warranties of merchantability or fitness for particular purpose. The dimensions in this document are for reference purposes only and are subject to change without notice.