

18-6 Unshielded Non-Plenum

UL listed for guaranteed performance

Part No.: 186TH

Applications:

This document establishes the specifications for a six conductor unshielded non-plenum cable used for power limited applications.

Construction Details:


Number of Conductors: 6/C
 Conductor: 18AWG Solid Bare Copper.
 Insulation material: Polyvinyl Chloride.
 Color code: Red, White, Green, Blue, Yellow, Brown
 Jacket material: Polyvinyl Chloride
 Jacket Color: UV Resistant Brown
 Nominal Diameter: 0.200 in.
 Surface Print: XXXXXX 18AWG 6/C CL2 (ETL)US (CSA)...UV RESISTANT
 *XXXXXX Represents ETL Control Number
 Sequential footage marking 0' to 250' with 250' on outside of reel

Electricals:

Suggested Working Voltage: Voltage Not Specified

Technical Details:

Temperature Rating	Operation	-20°C to +60°C
Nominal Weight:	40 lbs. / 1,000 ft.	

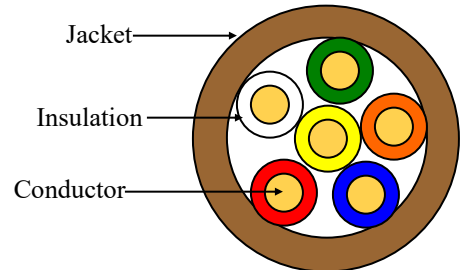

Standards:

- National Electric Code—Article 725
- UL Subject 13, Type CL2

Codes & Listings:

- UL or ETL

Preparation for Shipment:

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.