



12-2 Shielded Plenum

ETL listed for guaranteed performance
Made in the USA

Part No.: 760121

Applications:

This document establishes the specifications for a two conductor shielded plenum cable used for fire protective signaling applications.

Construction Details:

Number of Conductors: 2/C
Conductor: 12AWG Solid Bare Copper
Insulation Material: Remguard Plenum Polymer
Nominal Insulation Thickness: 0.013 in.
Nominal Insulation Diameter: 0.107 in.
Color Code: Black, Red
Shield: Aluminum/Polyester Tape (100% coverage)
Drain: Solid Tin Copper
Jacket Material: Remguard Plenum Polymer
Jacket Color: Red or Per Customer Requirement
Nominal Jacket Thickness: 0.015 in.
Nominal Diameter: 0.247 in.
Surface Print: 3122598 CMP/FPLP 12AWG
SHIELDED (ETL)US FT6 MADE
IN USA + Sequential Footage
Marking

Electricals:


Suggested Working Voltage: 300 Volts, rms.

Technical Details:

Temperature Rating

Operation: -2°C to +60°C

Nominal Weight: 62 lbs. / 1,000 Feet

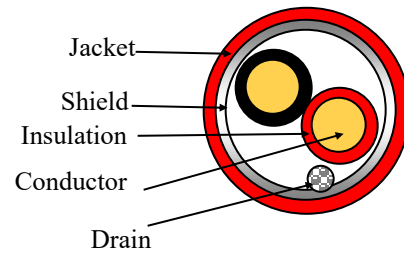

Standards:

- NEC Article 760
- UL Subject 1424, Type FPLP

Codes & Listings:

- (ETL)US

Preparation for Shipment:

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.





12-2 Shielded Plenum

ETL listed for guaranteed performance
Made in the USA

Part No.: 760121

Note: While Remeee Products Corp. has made every reasonable effort to ensure the accuracy of the information in this document, Remeee Products Corp. does not guarantee that it is error-free, nor does Remeee Products Corp. make any other representation, warranty, or guarantee that the information is accurate, correct, reliable or current. Remeee Products Corp. reserves the right to make any adjustments to the information contained herein at any time without notice. Remeee Products Corp. expressly disclaims all implied warranties regarding the information contained herein, including but not limited to, any implied warranties of merchantability or fitness for particular purpose. The dimensions in this document are for reference purposes only and are subject to change without notice.

