

# 22-2 Shielded 12-2 Unshielded Plenum

Part No.: LUQSHLPM1WN

## Applications:

This document establishes the specifications for a two pair, one pair shielded cable used for communication applications.

## Construction Details:

Conductor: 22AWG Stranded Bare Copper.  
Insulation Material: FEP  
Nominal Insulation Thickness: 0.012 in.  
Nominal Insulation diameter: 0.053 in.  
Color Code: White paired with Blue  
Shield: Aluminum/Polyester Tape (100% Coverage)  
Drain: 24AWG 7/32 Tin Copper

Conductor: 12AWG Stranded Bare Copper.  
Insulation Material: Remguard  
Nominal Insulation Thickness: 0.012 in.  
Nominal Insulation Diameter: 0.117 in.  
Color Code: Black, Red

Jacket Material: Remguard  
Jacket Color: White with a Brown Stripe  
Nominal Diameter: 0.310 in.  
Surface Print: 3122598 2/C 12 + 2/C 22 SHIELDED  
(ETL)US CL3P MADE IN USA +  
Sequential Footage Marking

## Electricals:

Suggested Working Voltage: 300 V RMS  
Max. Capacitance Cond-Cond: 25 pF/FT

## Technical Details:

Temperature Rating	
Operation	-2°C to +75°C
Nominal Weight:	68 Lbs. / 1,000 ft.

## Standards:

- National Electric Code - Article 800
- UL Subject 13 Type CL3P


## Codes & Listings:

- (ETL)US FT6

## Preparation for Shipment:

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.



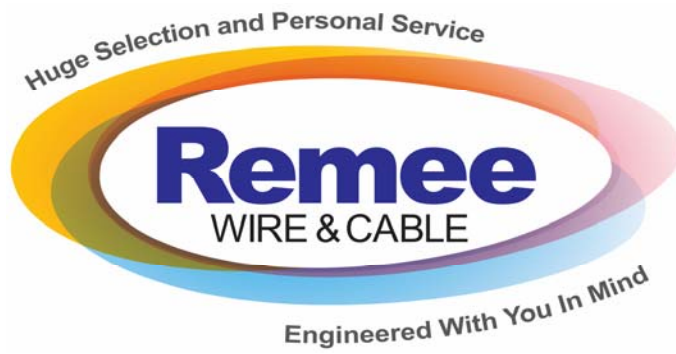

# 22-2 Shielded 12-2 Unshielded Plenum

Part No.: LUQSHLPM1WN

**Note:** While Remeewire Products Corp. has made every reasonable effort to ensure the accuracy of the information in this document, Remeewire Products Corp. does not guarantee that it is error-free, nor does Remeewire Products Corp. make any other representation, warranty, or guarantee that the information is accurate, correct, reliable or current. Remeewire Products Corp. reserves the right to make any adjustments to the information contained herein at any time without notice. Remeewire Products Corp. expressly disclaims all implied warranties regarding the information contained herein, including but not limited to, any implied warranties of merchantability or fitness for particular purpose. The dimensions in this document are for reference purposes only and are subject to change without notice.

