




## Heyco® Grommet Channels

### “DS” Channel

FIT PANEL THICKNESS RANGE				PART NO.	DESCRIPTION	PART DIMENSIONS			
Minimum		Maximum				A Overall Height	B Length		
in.	mm.	in.	mm.	Gray	in.		mm.	ft.	M.
<b>4' (1.2 M) Strip</b>									
.031	0,8	.062	1,6	<b>12430</b>	DS-062-48"	.30	7,6		
.020	0,5	.125	3,2	<b>12431</b>	DS-125-48"	.38	9,5		
.031	0,8	.188	4,8	<b>12432</b>	DS-188-48"	.50	12,7	4	1.2
.045	1,1	.250	6,4	<b>12433</b>	DS-250-48"	.63	15,9		

Standard color gray.

- This flexible Grommet Channel is ideal for protecting panel edges from being damaged.
- For use as wear strips, non-abrasive edging, noise-reducing conveyor strips, framing, or to protect from sharp edges.
- Features built-in lubricant for reduced friction and longer part life.

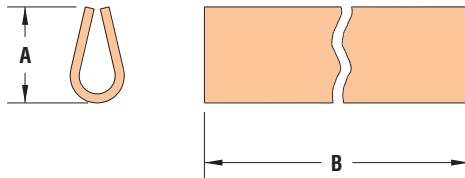

Material: PA66/6 MDS Filled Nylon  
 Flammability Rating: 94HB  
 Temperature Range: -40°F (-40°C) to 149°F (65°C) (DS Series)

*Quick  
Specs*