




- Retaining fingers without locking steps provide friction fit and allow removal of bushing.
- Insulate and mechanically protect electrical and telecommunications cables, tubing, hose, rope, and utility lines.
- Convert raw-edged holes to smooth, neat, insulated holes.
- Available in polypropylene. Consult Heyco.
- Available in multiple sizes for use in .375" (9,5 mm) to 1.375" (34,9 mm) diameter holes.

## Heyco® Pry Out Bushings

Mounting Hole Diameter Range: .375" (9,5 mm) to 1.375" (34,9 mm)

MOUNTING HOLE DIAMETER		PART NO.		DESCRIPTION	PART DIMENSIONS			
in.	mm.	Black	White		A Head Diameter		B Overall Height	
					in.	mm.	in.	mm.
Clearance Fit for Panel Thickness up to .172" (4,4 mm)								
.375	9,5	<b>14059</b>	<b>14060</b>	POB 375	.57	14,5		
.500	12,7	<b>14065</b>	<b>14066</b>	POB 500	.67	17,0		
.625	15,9	<b>14071</b>	<b>14072</b>	POB 625	.79	20,1		
.750	19,0	<b>14077</b>	<b>14078</b>	POB 750	.97	24,6	.41	10,4
.875	22,2	<b>14083</b>	<b>14084</b>	POB 875	1.05	26,7		
1.000	25,4	<b>14086</b>	<b>14087</b>	POB 1000	1.20	30,5		
1.093	27,8	<b>14089</b>	<b>14090</b>	POB 1093	1.30	33,0		
1.375	34,9	<b>14098</b>	<b>14099</b>	POB 1375	1.58	40,1	.45	11,4

Standard color black. Consult Heyco for other colors.

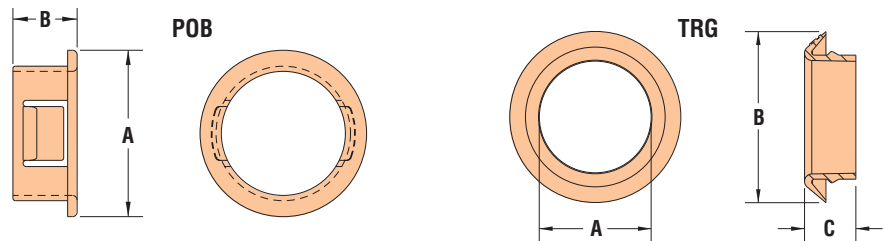

- Convert raw-edged holes to smooth, neat, insulated holes.
- Retaining bead snaps securely into place.
- Insulate and mechanically protect cable, tubing, hose, rope, rods, and shafts.
- UL approved for applications up to 122° F (50°C).
- Eleven diameters fit panel thickness from .03" (0,8 mm) to .13" (3,2 mm).
- Consult Heyco for custom IDs.
- For Heyco UL Listed Thermoplastic Rubber Grommets, see page 6-9.

## Heyco® UL Recognized Thermoplastic Rubber Grommets

Mounting Hole Diameter Range: .375" (9,5 mm) to 2.000" (50,8 mm)

MOUNTING HOLE DIAMETER		PART NO.	DESCRIPTION	PART DIMENSIONS					
in.	mm.	Black		A Inside Diameter		B Head Diameter		C Overall Height	
			in.	mm.	in.	mm.	in.	mm.	
For Panel Thickness from .03" (0,8 mm) to .094" (2,4 mm)									
.375	9,5	<b>13804</b>	TRG 375-270	.28	7,1	.70	17,8		
.500	12,7	<b>13808</b>	TRG 500-395	.41	10,4	.83	21,1	.36	9,1
.625	15,9	<b>13813</b>	TRG 625-520	.53	13,5	.95	24,1		
For Panel Thickness from .03" (0,8 mm) to .125" (3,2 mm)									
.750	19,1	<b>13817</b>	TRG 750-645	.66	16,8	1.07	27,2		
.875	22,2	<b>13821</b>	TRG 875-770	.79	20,1	1.20	30,5		
1.000	25,4	<b>13824</b>	TRG 1000-890	.91	23,1	1.33	33,8		
1.093	27,8	<b>13828</b>	TRG 1093-1000	1.01	25,7	1.42	36,1		
1.250	31,8	<b>13831</b>	TRG 1250-1125	1.14	29,0	1.57	39,9	.36	9,1
1.375	34,9	<b>13833</b>	TRG 1375-1250	1.26	32,0	1.70	43,2		
1.500	38,1	<b>13835</b>	TRG 1500-1375	1.39	35,3	1.83	46,5		
2.000	50,8	<b>13840</b>	TRG 2000-1875	1.89	48,0	2.33	59,2		

Standard color black.

Quick Specs

	POB	TRG
Material	Nylon 6/6	Flex Temp (Thermoplastic Rubber)
Certifications		Recognized under the Component Program of Underwriters' Laboratories, File E15331
Flammability Rating	94V-2	94-HB
Temperature Range	-40°F (-40°C) to 221°F (105°C)	32°F (0°C) to 122°F (50°C)