

“Stay Connected” with



Solar Power Components

a PennEngineering® Company




## Heyco® Nytye® Nylon 12 Cable Ties

PART SPECIFICATIONS				PART NO.	DESCRIPTION	PART DIMENSIONS			
Tensile Strength		Max. Bundle Diameter				A Length		B Width	
Lbs.	N	in.	mm.			in.	mm.	in.	mm.
18	80	.87	22,0	<b>13502B</b>	NT-18-039-12	3.94	100,0	.10	2,5
		1.18	30,0	<b>13505B</b>	NT-18-047-12	4.72	120,0		
		1.57	40,0	<b>13508B</b>	NT-18-063-12	6.30	160,0		
		2.36	60,0	<b>13511B</b>	NT-18-078-12	7.87	200,0		
40	78	1.38	35,0	<b>13340B</b>	NT-40-058-12	5.84	148,3	.14	3,6
		1.97	50,0	<b>13526B</b>	NT-40-078-12	7.87	200,0		
		4.02	102,0	<b>13534B</b>	NT-40-145-12	14.57	370,0		
50	222	1.97	50,0	<b>13342B</b>	NT-50-078-12	7.87	200,0	.19	4,8
		2.56	65,0	<b>13547B</b>	NT-50-098-12	9.84	250,0		
		2.76	70,0	<b>13343B</b>	NT-50-110-12	11.02	280,0		
		3.23	82,0	<b>13551B</b>	NT-50-118-12	11.81	300,0		
		4.02	102,0	<b>13344B</b>	NT-50-143-12	14.35	364,5		
		5.12	130,0	<b>13558B</b>	NT-50-177-12	17.72	450,0		
120	534	3.98	101,0	<b>13585B</b>	NT-120-149-12	14.96	380,0	.30	7,6
		6.88	174,6	<b>13562B</b>	NT-120-236-12	23.60	600,0		
		7.80	198,1	<b>13564B</b>	NT-120-279-12	27.95	710,0		

Standard color UV Black.  
Nylon 12 UV Black Nytyes available in 100 packs. Add -P to Part No.; eg, 13342B-P.



- Smooth, radiused edges ensure that Nytyes won't cut into the cable's insulation—or the installer's hand.
- One-piece design reduces cost and installation time.
- Nytyes feature a bent tip for ease of pickup and insertion around small bundles. V-shaped raised ridges on the tip provide a sure grip.
- Nylon 12 cable ties are weather/UV resistant and suitable for high moisture, corrosive and low temperature indoor or outdoor applications.
- Close, evenly spaced teeth permit fine adjustment—from .025" (0,6 mm) on the smallest Nytyes to .063" (1,6 mm) on the largest.
- Nylon 12 UV Black Nytyes available in 100 packs. Add -P to Part No.; eg, 13342B-P.
- Compliant with MS3367 and MIL-S-23190E.

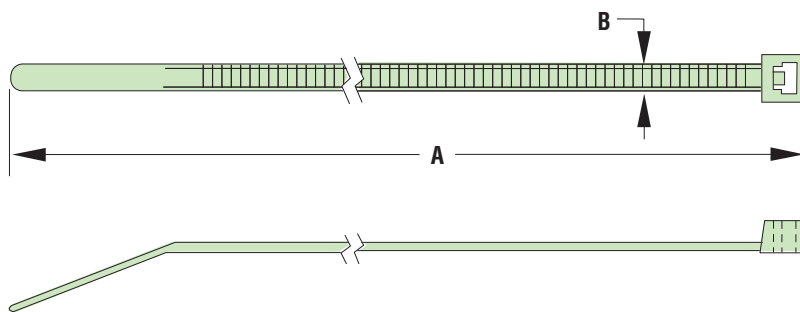

## Heyco® Cable Tie Tensioning Tool



**Part No. 0998** (for Nylon) and **0996** (for Stainless Steel) fits all standard duty Nytyes. Metal construction, has three tension settings, and automatically trims excess.

Material: Nylon 12 Weather Resistant  
Flammability Rating: UL94 HB  
Temperature Range: -40°F (-40°C) to 248°F (120°C)

*Quick Specs*