

“Stay Connected” with



HEYware Products

a PennEngineering® Company

Heyco® Nytye® Heavy Duty Nylon Cable Ties

PART SPECIFICATIONS				PART NO.		DESCRIPTION	PART DIMENSIONS			
Tensile Strength		Max. Bundle Diameter		Natural	UV Black		A Length		B Width	
Lbs.	N	in.	mm.				in.	mm.	in.	mm.
120 Pound										
120	534	1.30	33.0	13172	13172B	NT-120-059	5.91	150	.30	7.6
		1.97	50.0	13175	13175B	NT-120-078	7.87	200		
		2.48	63.0	13178	13178B	NT-120-098	9.84	250		
		3.23	82.0	13181	13181B	NT-120-118	11.81	300		
		3.54	90.0	13183	13183B	NT-120-137	13.78	350		
		3.98	101.0	13185	13185B	NT-120-149	14.96	380		
		4.13	105.0	13186	13186B	NT-120-157	15.75	400		
		6.10	155.0	13190	13190B	NT-120-216	21.65	550		
175 Pound										
175	778	4.13	105.0	13200	13200B	NT-175-157	15.75	400	.35	9.0
		4.92	125.0	13201	13201B	NT-175-177	17.72	450		
		5.91	150.0	13203	13203B	NT-175-195	19.49	495		
		6.30	160.0	13205	13205B	NT-175-217	21.65	550		
		6.89	175.0	13207	13207B	NT-175-236	23.62	600		
		7.48	190.0	13208	13208B	NT-175-256	25.59	650		
		8.07	205.0	13211	13211B	NT-175-276	27.55	700		
		8.86	225.0	13213	13213B	NT-175-299	29.92	760		
		9.65	245.0	13215	13215B	NT-175-315	31.50	800		
		10.67	271.0	13217	13217B	NT-175-362	36.22	920		
		11.42	290.0	13218	13218B	NT-175-394	39.37	1000		
		14.49	368.0	13220	13220B	NT-175-482	48.23	1225		
		18.07	459.0	13223	13223B	NT-175-606	60.63	1540		
250 Pound										
250	1112	5.47	140.0	13225*	13225B*	NT-250-196	19.68	500	.49	12.5
		6.50	168.0	13226*	13226B*	NT-250-228	22.83	580		
		10.00	190.0	13227*	13227B*	NT-250-256	25.59	650		
		10.71	272.0	13228*	13228B*	NT-250-350	35.04	890		
		10.55	268.0	13229	13229B	NT-250-354	35.43	900		
		11.77	299.0	13230	13230B	NT-250-394	39.37	1000		
		12.72	323.0	13231	13231B	NT-250-433	43.31	1100		
		14.33	364.0	13232	13232B	NT-250-472	47.24	1200		

Standard colors natural and UV Black. Consult Heyco for heat-stabilized material and colors.



*UL Recognized.

Heyco® Nytye® Double Loop Cable Ties

PART SPECIFICATIONS				PART NO.		DESCRIPTION	PART DIMENSIONS			
Tensile Strength		Max. Combined Bundle Diameter		Natural	NEW UV Black		A Length		B Width	
Lbs.	N	in.	mm.				in.	mm.	in.	mm.
50	222	1.77	45.0	13320	13320B	NTDL-050-076	7.68	195	.19	4.8
		2.05	52.0	13321	13321B	NTDL-050-088	8.86	225		
		2.99	76.0	13323	13323B	NTDL-050-118	11.81	300		
		3.86	98.0	13324	13324B	NTDL-050-145	14.56	370		

Standard color natural.

$$\varnothing D + \varnothing E = \varnothing F \text{ (MAXIMUM COMBINED BUNDLE } \varnothing \text{)}$$

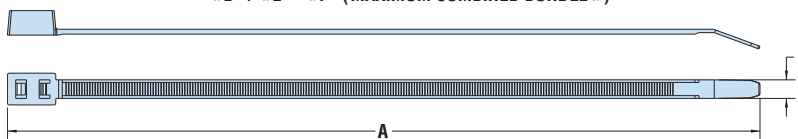

Material
Certifications

Nylon 6/6



Certified by UL for Compliance with both Canadian and U.S. requirements under File E54523 (NT parts only, except those noted otherwise)



Recognized under the Component Program of Underwriters' Laboratories File E54523


Flammability Rating
Temperature Range

94V-2

-40°F (-40°C) to 185°F (85°C)

Quick
Specs

- Smooth, radiused edges ensure that Nytyes won't cut into the cable's insulation—or the installer's hand.
- One-piece design reduces cost and installation time.
- Nytyes feature a bent tip for ease of pickup and insertion around small bundles. V-shaped raised ridges on the tip provide a sure grip.
- Close, evenly spaced teeth permit fine adjustment—from .025" (0,6 mm) on the smallest Nytyes to .063" (1,6 mm) on the largest.
- Compliant with MS3367 and MIL-S-23190E

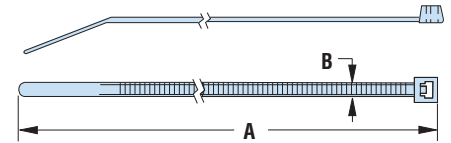

- Cost-effective way to secure and separate two bundles with one cable tie
- Quickly and easily pulls through increasing productivity
- Single part covers multiple bundle sizes resulting in reduced part number inventory