

“Stay Connected” with



Solar Power Components

a PennEngineering® Company




Heyco® Nytyes® with Stainless Steel Locking Device

- Feature metal pawl for high strength and better durability.
- Self-locking head design speeds installation and locks into place at any length along the tie body.
- Provide a strong, durable method of cable bundling.
- Can be used in a wide range of indoor, outdoor, and underground (including direct burial) applications.
- Smooth surfaces and rounded edges assure cable protection and worker safety.
- Part Description Key: NTMP-XXX-YYY where XXX = tensile (foot pounds) and YYY = length (inches x 10).
- These parts are not covered under Heyco's solar warranty.

| PART SPECIFICATIONS | | | | PART NO. | | DESCRIPTION | PART DIMENSIONS | | | | | |
|---------------------|-----|----------------------|-------|--------------|---------------|--------------|-----------------|-----|---------|------|-------------|-----|
| Tensile Strength | | Max. Bundle Diameter | | Natural | Black | | A Length | | B Width | | C Thickness | |
| Lbs. | N | in. | mm. | | | in. | mm. | in. | mm. | in. | mm. | |
| 18 | 80 | .87 | 22,0 | 13000 | 13000B | NTMP-018-039 | 3.90 | 100 | .12 | 3,0 | .04 | 1,1 |
| 35 | 160 | 1.42 | 36,0 | 13001 | 13001B | NTMP-036-059 | 5.90 | 150 | .16 | 4,0 | .05 | 1,2 |
| | | 2.09 | 53,0 | 13002 | 13002B | NTMP-036-079 | 7.90 | 200 | | | | |
| 45 | 200 | 2.56 | 65,0 | 13003 | 13003B | NTMP-045-098 | 9.80 | 250 | .20 | 5,0 | .06 | 1,5 |
| | | 2.99 | 76,0 | 13004 | 13004B | NTMP-045-118 | 11.80 | 300 | | | | |
| 56 | 250 | 2.09 | 53,0 | 13008 | 13008B | NTMP-056-079 | 7.90 | 200 | .31 | 8,0 | .07 | 1,7 |
| | | 2.60 | 66,0 | 13009 | 13009B | NTMP-056-094 | 9.40 | 240 | | | | |
| | | 2.99 | 76,0 | 13010 | 13010B | NTMP-056-118 | 11.80 | 300 | | | | |
| 112 | 500 | 2.99 | 76,0 | 13011 | 13011B | NTMP-112-118 | 11.80 | 300 | .39 | 10,0 | .07 | 1,7 |
| | | 3.74 | 95,0 | 13012 | 13012B | NTMP-112-138 | 13.80 | 350 | | | | |
| | | 4.45 | 113,0 | 13013 | 13013B | NTMP-112-157 | 15.70 | 400 | | | | |
| 124 | 550 | 4.72 | 120,0 | 13014 | 13014B | NTMP-124-177 | 17.70 | 450 | .39 | 10,0 | .07 | 1,7 |
| | | 6.22 | 158,0 | 13015 | 13015B | NTMP-124-197 | 19.70 | 500 | | | | |

Standard colors natural and UV Black.



| | |
|---------------------|--|
| Material | Nylon 6/6 wire tie with a stainless steel locking pawl |
| Flammability Rating | 94V-2 |
| Temperature Range | -40°F (-40°C) to 185°F (85°C) |

For Heyco's complete line of Nylon Cable Ties & Platforms, see pages 7-65 thru 7-73



Heyco® SunBundler®


Crimp Lock PVC Coated Stainless Steel Wire Cable Ties



- Smooth vinyl jacketing prevents damage to installation cable insulation.
- Easy field installation using standard pliers or wire cutters to both crimp the sleeve and cut the excess wire.
- **Certified by UL Specification 62275 for indoor and outdoor usage for Type 2 & 2S classifications.**
- UV protected vinyl jacket is excellent for solar installation where product durability is required.
- Not for use in a marine salt water environment. Contact Heyco for alternative materials.
- DFARS Compliant.

| PART SPECIFICATIONS | | | | PART NO. | | DESCRIPTION | PART DIMENSIONS | | | |
|---|-----|----------------------|-------|--------------|--------------|----------------|-----------------|------|------------|-----|
| Max. Tensile Strength | | Max. Bundle Diameter | | 100 Pack | Bulk | | A Length | | B Diameter | |
| Lbs. | N | in. | mm. | | | in. | mm. | in. | mm. | |
| Black vinyl jacketed 302/304 stainless steel wire | | | | | | | | | | |
| 125 | 560 | .95 | 24,1 | S6484 | S6485 | SunBundler® 4* | 4 | 102 | .06 | 1,6 |
| | | 1.55 | 39,4 | S6486 | S6487 | SunBundler® 6 | 6 | 152 | | |
| | | 2.30 | 58,4 | S6408 | S6409 | SunBundler® 8 | 8 | 203 | | |
| | | 2.92 | 74,2 | S6410 | S6411 | SunBundler® 10 | 10 | 254 | | |
| | | 3.88 | 98,6 | S6412 | S6413 | SunBundler® 12 | 12 | 305 | | |
| | | 4.20 | 106,7 | S6414 | S6415 | SunBundler® 14 | 14 | 356 | | |
| | | 6.36 | 161,5 | S6420 | S6421 | SunBundler® 20 | 20 | 508 | | |
| | | 7.32 | 185,9 | S6424 | S6425 | SunBundler® 24 | 24 | 610 | | |
| | | 8.59 | 218,2 | S6426 | S6427 | SunBundler® 28 | 28 | 711 | | |
| | | 9.87 | 250,7 | S6428 | S6429 | SunBundler® 32 | 32 | 813 | | |
| | | 11.13 | 282,7 | S6430 | S6431 | SunBundler® 36 | 36 | 914 | | |
| | | 12.41 | 315,2 | S6491 | S6492 | SunBundler® 40 | 40 | 1016 | | |
| | | 13.63 | 346,2 | S6493 | S6494 | SunBundler® 44 | 44 | 1118 | | |

Standard color Black.
*Non UL

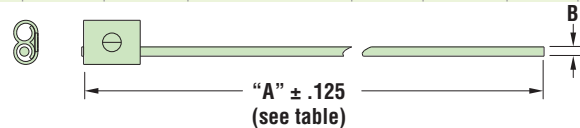

| | |
|-------------------|---|
| Material | Commercial Aircraft Grade 302/304 stainless wire w/UV protected vinyl jacket |
| Certifications | Certified by Underwriters' Laboratories for Compliance to both Canadian and U.S. Requirements under File E54523 |
| Temperature Range | -40°F (-40°C) to 221°F (105°C) |

