


- For continuous grounding wire runs often found in solar applications.
- Available in plated and unplated versions.
- UL/CSA approved for direct burial; suitable for both indoor and outdoor use.
- Least expensive aluminum option suitable for indoor use only.
- Recommended wire range AWG 4 thru AWG 14.
- DFARS Compliant.

## Heyco® Copper and Aluminum LugRunners™

Wire Range AWG	PART NO.	DESCRIPTION	CONSTRUCTION	PART DIMENSIONS (in.)					
				A	B	C	D	F	H
4-14	S6525	LC 14-4 1-Pole Cu Tinned	Tinned Copper with Stainless Steel Set Screw	1.07	.75	.38	.22	.19	.15
	S6526	LC 14-4 1-Pole Cu	Copper with Stainless Steel Set Screw						
	S6527	LC 14-4 1-Pole Al	Aluminum with Steel Set Screw						

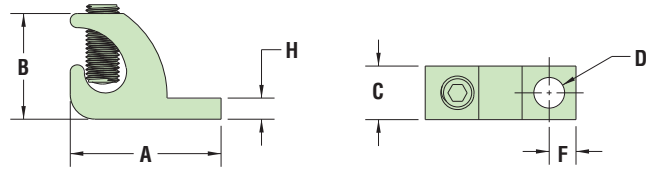


Material	Tinned copper or High Strength, High Conductive Aluminum Alloy 606/T6 with stainless steel set screw
Certifications	Listed under Underwriters' Laboratories File E467246



## Heyco® SunJumpers™

- .250" hole diameter tinned copper Heavy Duty Ring Terminals at both ends.
- Terminals accept a #10 screw.
- Approved to UL 467 Grounding and Bonding standard.
- DFARS Compliant.

LENGTH		PART NO.	DESCRIPTION
in.	mm.		
6	152.4	S6506	SunJumper 6
11	279.4	S6511	SunJumper 11
18	457.2	S6518	SunJumper 18




- Create bond between PV module and racking system.
- UL Recognized to UL Standard 2703
- Universal design for quick installation. Extrusions are symmetrically opposed for maximum strength.
- Stainless steel construction for maximum durability.
- DFARS Compliant.

## Heyco® SunStars™

Grounding Spacers for Module to Rack Applications

PART DIMENSIONS				PART NO.	DESCRIPTION
Inside Dia.		Outside Dia.			
in.	mm.	in.	mm.		
.32	8,1	.75	19,1	S6480	SSGS 750-320
		1.00	25,4	S6481	SSGS 1000-320
		1.25	31,8	S6482	SSGS 1250-320



Material	6 AWG tinned copper braided wire (SunJumpers) 304 Stainless Steel (SunStars)
Certifications	Listed under Underwriters' Laboratories File E467246 (SunJumpers) Recognized under the Component Program of Underwriters' Laboratories File E467241 (SunStars)