



CI and MI C-TYPE standard version

inserts		page:
CD	40 poles + ⊕	70
CDD	72 poles + ⊕	79
CDS	27 poles + ⊕	-
CDSH	27 poles + ⊕	88
CNE	16 poles + ⊕	112
CSE	16 poles + ⊕	-
CSH	16 poles + ⊕	112
CSH S	16 poles + ⊕	124
CCE	16 poles + ⊕	132
CMSH, CMCE	6+2 (aux) poles + ⊕	138 - 139
CSS	16 poles + ⊕	150
CQE	32 poles + ⊕	170
CQEE	40 poles + ⊕	176
CP	6 poles + ⊕	178
CX	6/12, 6/36 and 12/2 poles + ⊕	197 - 199
CX	4/0 and 4/2 poles + ⊕	200 - 201
MIXO	4 modules	262 - 317

inclined hoods for 2 levers
with side entry



inclined hoods for 2 levers
with top entry




description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
used with enclosures size "77.27" with pegs for two levers, side entry	CIO 16.36	36	MIO 16.40	40				
with pegs for two levers, side entry			MIO 16.50	50				
used with enclosures size "77.27" with pegs for two levers, top entry					CIV 16.29	29	MIV 16.40	40


IP degrees are according to the type of lever of the counterpart enclosures.
Alternatively, hoods with pegs may be coupled with fixed enclosures:

- C-TYPE, IP65 or IP66/IP69 stainless steel lever, from page 402 to page 410
- C7, IP66/**IP67**/IP69 stainless steel lever, page 439
- CV, IP65 or IP66/IP69 stainless steel lever, page 454 and 455

CIO and MIO

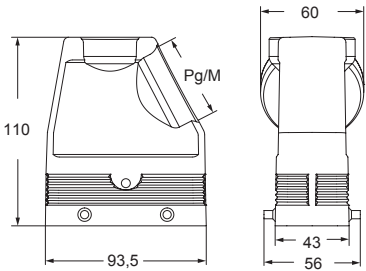

CIV and MIV

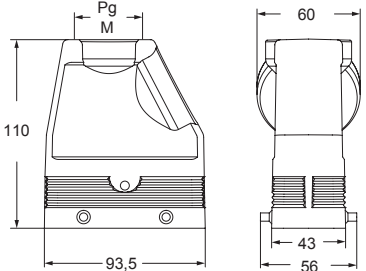

CAUS® Type 4/4X/12



insulating cable gland or fittings without gasket



cable gland with O-Ring gasket according to the type of lever