



CV - CVA and MV - MVA V-TYPE lever version

inserts		page:
CD	40 poles + ⊕	70
CDD	72 poles + ⊕	79
CDS	27 poles + ⊕	-
CDSH	27 poles + ⊕	88
CNE	16 poles + ⊕	112
CSE	16 poles + ⊕	-
CSH	16 poles + ⊕	112
CSH S	16 poles + ⊕	124
CCE	16 poles + ⊕	132
CMSH, CMCE	6+2 (aux) poles + ⊕	138 - 139
CSS	16 poles + ⊕	150
CQE	32 poles + ⊕	170
CQEE	40 poles + ⊕	176
CP	6 poles + ⊕	178
CX	6/12, 6/36 and 12/2 poles + ⊕	197 - 199
CX	4/0 and 4/2 poles + ⊕	200 - 201
MIXO	4 modules	262 - 317

surface mounting housings
with single lever in stainless steel
and plastic cover




surface mounting housings
with single lever in stainless steel
and aluminium cover



description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
with lever and cover, size “77.27”	CVP 16 LP	21	MVP 16 LP25	25	CVP 16 LS	21	MVP 16 LS25	25
with lever and cover, size “77.27”	CVP 16 LP2	21 x 2	MVP 16 LP225	25 x 2	CVP 16 LS2	21 x 2	MVP 16 LS225	25 x 2
with lever and cover, high construction, size “77.27”	CVAP 16 LP21	21	MVAP 16 LP32	32	CVAP 16 LS	21	MVAP 16 LS32	32
with lever and cover, high construction, size “77.27”	CVAP 16LP221	21 x 2	MVAP 16LP232	32 x 2	CVAP 16 LS2	21 x 2	MVAP 16LS232	32 x 2
with lever and cover, high construction, size “77.27”	CVAP 16 LP29	29	MVAP 16 LP40	40	CVAP 16 LS29	29	MVAP 16 LS40	40
with lever and cover, high construction, size “77.27”	CVAP 16LP229	29 x 2	MVAP 16LP240	40 x 2	CVAP 16LS229	29 x 2	MVAP 16LS240	40 x 2


☑ The enclosures ensure IP66 (or IP65 cover versions)
degree of protection when mated and locked with the
closing levers.

CVP LP - CVAP LP and MVP LP - MVAP LP

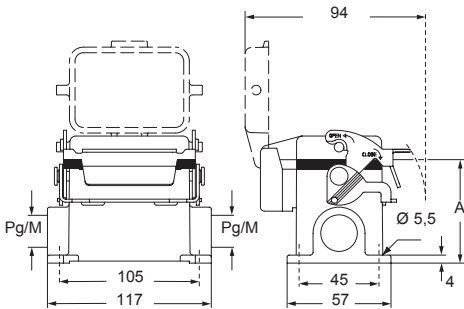

type	A
CVP/MVP 16 LP	63
CVAP/MVAP 16 LP	81

CVP LS - CVAP LS and MVP LS - MVAP LS

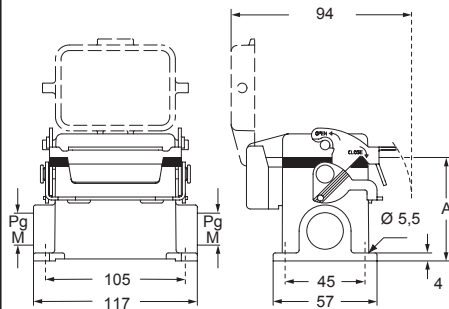

type	A
CVP/MVP 16 LS	63
CVAP/MVAP 16 LS	81

Hoods
(from page 404)



CALUS® Type
4/4X/12
(except enclosures with plastic cover)

