

CV - CVA and MV - MVA V-TYPE lever version

inserts	page
CD	64 poles + \oplus
CDD	108 poles + \oplus
CDS	42 poles + \oplus
CDSH	42 poles + \oplus
CNE	24 poles + \oplus
CSE	24 poles + \oplus
CSH	24 poles + \oplus
CSH S	24 poles + \oplus
CCE	24 poles + \oplus
CMSH	10+2 (aux) poles + \oplus
CMCE	10+2 (aux) poles + \oplus
CSS	24 poles + \oplus
CQE	46 poles + \oplus
CQEE	64 poles + \oplus
CX	4/8 and 6/6 poles + \oplus
MIXO	6 modules

surface mounting housings
with single lever in stainless steel
and plastic cover






surface mounting housings
with single lever in stainless steel
and aluminium cover




description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
with lever and cover, size "104.27"	CVP 24 LP	21	MVP 24 LP25	25	CVP 24 LS	21	MVP 24 LS25	25
with lever and cover, size "104.27"	CVP 24 LP2	21 x 2	MVP 24 LP225	25 x 2	CVP 24 LS2	21 x 2	MVP 24 LS225	25 x 2
with lever and cover, high construction, size "104.27"	CVAP 24 LP21	21	MVAP 24 LP32	32	CVAP 24 LS	21	MVAP 24 LS32	32
with lever and cover, high construction, size "104.27"	CVAP 24LP221	21 x 2	MVAP 24LP232	32 x 2	CVAP 24 LS2	21 x 2	MVAP 24LS232	32 x 2
with lever and cover, high construction, size "104.27"	CVAP 24 LP29	29	MVAP 24 LP40	40	CVAP 24 LS29	29	MVAP 24 LS40	40
with lever and cover, high construction, size "104.27"	CVAP 24LP229	29 x 2	MVAP 24LP240	40 x 2	CVAP 24LS29	29 x 2	MVAP 24LS240	40 x 2

- ☒ The enclosures ensure IP66 (or IP65 cover versions) degree of protection when mated and locked with the closing levers.

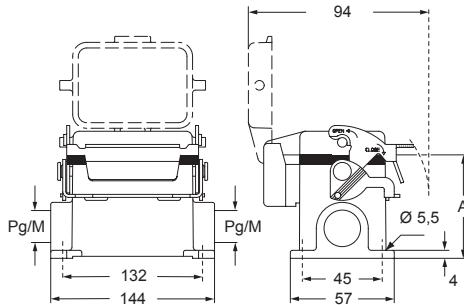

type	A
CVP/MVP 24 LP	63
CVAP/MVAP 24 LP	81



type	A
CVP/MVP 24 LS	63
CVAP/MVAP 24 LS	81

Hoods (from page 414)



The logo for CRL US, featuring the letters 'CRL' in a bold, blocky font with a registered trademark symbol, and 'US' in a smaller, sans-serif font to the right.

Type
4/4X/12

(except enclosures with plastic cover)

