



7/8” MIN Power Series Size I “T” Connectors
3 & 4 Conductor MIN Power Series Size I “T” Connectors



“T” Connectors | 600 Volt, 18 amps | 600 Volt, 15 amps | IP67 Rating




# of Poles	Male Faceview	Rating	Part Number	Wiring	Female Faceview
3	 7/8"-16UN2	600V 18A	MINH-3MFF-T-B	1 to 1 to 1 2 to 2 to 2 3 to 3 to 3	 7/8"-16UN2
4	 7/8"-16UN2	600V 15A	MINH-4MFF-T-B	1 to 1 to 1 2 to 2 to 2 3 to 3 to 3 4 to 4 to 4	 7/8"-16UN2

Stainless Steel Couplings available; please consult the factory for part number and availability.

Specifications:

- Body: Oil Resistant PVC
- Contacts: Copper Alloy with Gold Plating
- Coupling Nut: Nickel Plated Brass
- Temperature: -40°C to +105°C (-40°F to +221°F)

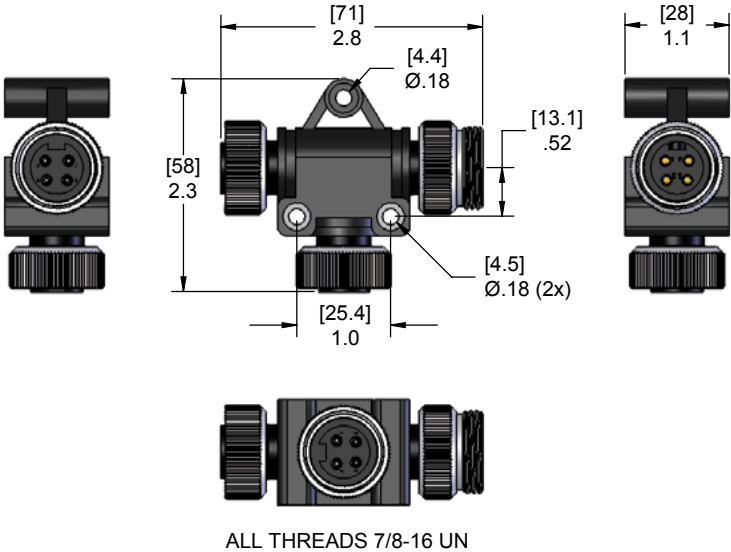

D
MIN Power Cordsets