



MCL (M16) Series Field Wireable Plugs

12 & 14 Conductor MCL Series Field Wireable Plugs, 24-28AWG




Field Wireable Plugs | Solder Cups | 60 Volt, 3 amps | IP67 Rating




M
M16 Series

| # of Poles | Male Faceview | Rating | Wire AWG | Cable O.D. Range | Part Number | |
|------------|----------------|-----------|-----------|------------------|-----------------------------|---------------------------------|
| | | | | | Male Plug (Male Threads) | Female Plug (Female Threads) |
| 12 | M16 x 0.75 | 60V 3A | 24-28 AWG | 4-6 mm | MCL-12MP-FW07 | MCL-12FP-FW07 |
| | | | | 6-8 mm | MCL-12MP-FW09 | MCL-12FP-FW09 |
| 14 | M16 x 0.75 | 60V 3A | 24-28 AWG | 4-6 mm | MCL-14MP-FW07 | MCL-14FP-FW07 |
| | | | | 6-8 mm | MCL-14MP-FW09 | MCL-14FP-FW09 |

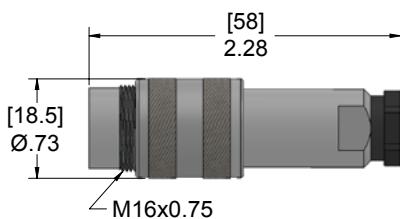

Male Plug with Male Threads

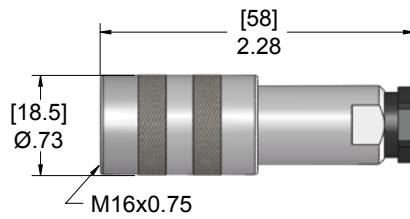

Female Plug with Female Threads

Specifications:

Body: Nickel Plated Brass
 Contacts: Copper Alloy with Gold Plating
 O-Ring: NBR
 Insert: PBT
 Termination: Solder Cup 24-28 AWG
 Temperature: -30°C to +95°C (-22°F to +203°F)