



MCX (M27) Series Receptacles


26 & 28 Conductor M27 Series Receptacles




Front Mount | Metric & PG Threads | IP67 Rating

# of Poles	Male Faceview	Color Code			Wire AWG	Mounting Threads	Male Receptacles
26		1. White 2. Brown 3. Green 4. Yellow 5. Gray 6. Pink 7. Blue 8. Red 9. Black	10. Violet 11. Gray/Pink 12. Red/Blue 13. White/Green 14. Brown/Green 15. White/Yellow 16. Yellow/Brown 17. White/Gray 18. Gray/Brown	19. White/Pink 20. Pink/Brown 21. White/Blue 22. Brown/Blue 23. White/Red 24. Brown/Red 25. White/Black 26. Green Yellow	22 AWG	M20	MCX-26MR-**-M20
						M25	MCX-26MR-**-M25
						M25L	MCX-26MR-**-M25L
						PG21	MCX-26MR-**-PG21
28		1. White 2. Brown 3. Green 4. Yellow 5. Gray 6. Pink 7. Blue 8. Red 9. Black 10. Violet	11. Gray/Pink 12. Red/Blue 13. White/Green 14. Brown/Green 15. White/Yellow 16. Yellow/Brown 17. White/Gray 18. Gray/Brown 19. White/Pink 20. Pink/Brown	21. White/Blue 22. Brown/Blue 23. White/Red 24. Brown/Red 25. White/Black 26. Green Yellow 27. Brown/Black 28. Gray/Green	22 AWG	M20	MCX-28MR-**-M20
						M25	MCX-28MR-**-M25
						M25L	MCX-28MR-**-M25L
						PG21	MCX-28MR-**-PG21


** Length in meters. 0.3m leads are standard. Longer lead lengths are available, please consult the factory for part numbers.

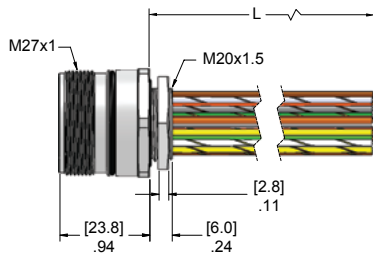


M20 Threads

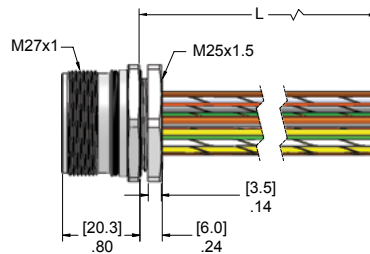

M25 Threads

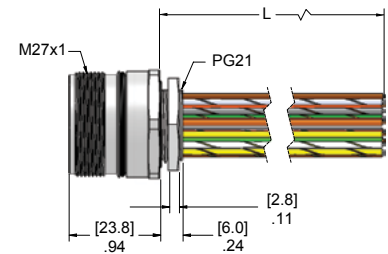

PG21 Threads

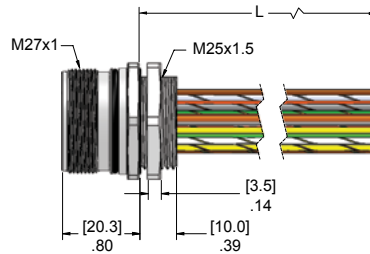

M25L Threads

Specifications:

Body: Nickel Plated Brass
Contacts: Copper Alloy with Gold Plating
Coupling Nut: Nickel Plated Brass
Insulator: Polyamide

O-Ring: FPM
Jam Nut: Nickel Plated Brass
Temperature: -40°C to +105°C (-40°F to +221°F)