



Profibus-PA Series Receptacles

4 Conductor Profibus-PA Series Receptacles, 18AWG




Front Mount Receptacles | PG9 & Metric Threads | 300 Volt, 4 amps | IP69 Rating




# of Poles	Male Faceview	Color Code	Rating	Wire AWG	Threads	Male Receptacles	Female Receptacles
4	<p>M12 x 1</p>	1. Blue(-) 2. Orange(+) 3. Shield 4. N/C	300V 4A	18 AWG	PG9	PBDC-4MR-PG9-**-SS	PBDC-4FR-PG9-**-SS
					M20	PBDC-4MR-M20-**-SS	PBDC-4FR-M20-**-SS

** Lengths in meters.
 Lock Nut and O-Ring are included.

PG9 Threads

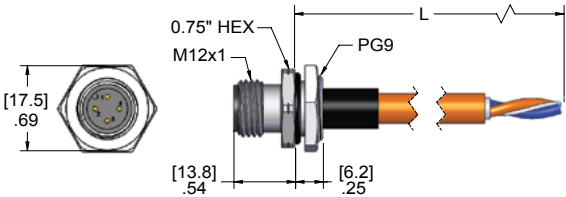


Male Receptacle

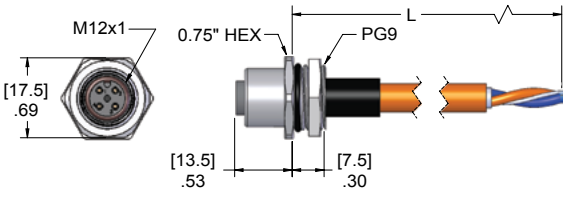


Female Receptacle

M20 Threads

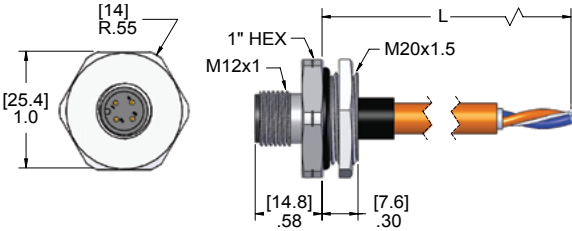

Male Receptacle

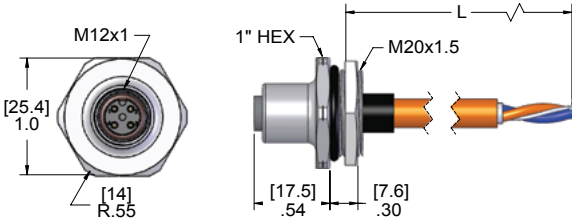

Female Receptacle

Specifications:

- Shell: Stainless Steel
- Insulator: Polyamide
- Cable: Orange PVC, 2x18 AWG Cable with Foil Shield
- Contacts: Copper Alloy with Gold Plating
- O-Ring: NBR
- Jam Nut: Nickel Plated Brass
- Temperature: -40°C to 105°C (-40°F to +221°F)