



# Profibus-PA Series "T" Connectors

## 4 Conductor Profibus-PA Series "T" Connectors, 14-22AWG




"T" Connectors | Male to Female | 300 Volt, 4/8 amps MAX | IP67 Rating




| 7/8"-16UN Male to Two 7/8"-16UN Female   |                |            |                  |  |                 |
|--|----------------|------------|------------------|--|-----------------|
| # of Poles                               | Male Faceview  | Rating     | Part Number      | Wiring   | Female Faceview |
| 4  | <br>7/8"-16UN2 | 300V<br>8A | PBIN-4MFF-T-SS   | 1 to 1 to 1<br>2 to 2 to 2<br>3 to 3 to 3<br>4 to 4 to 4 | <br>7/8"-16UN2  |
| 7/8"-16UN Male to 7/8"-16UN & M12 Female |                |            |                  |  |                 |
| 4  | <br>7/8"-16UN2 | 300V<br>4A | PBINDC-4MFF-T-SS | 1 to 1 to 1<br>2 to 2 to 2<br>3 to 3 to 3<br>4 to 4 to 4 | <br>M12 x 1     |

Profibus-PA Series

0

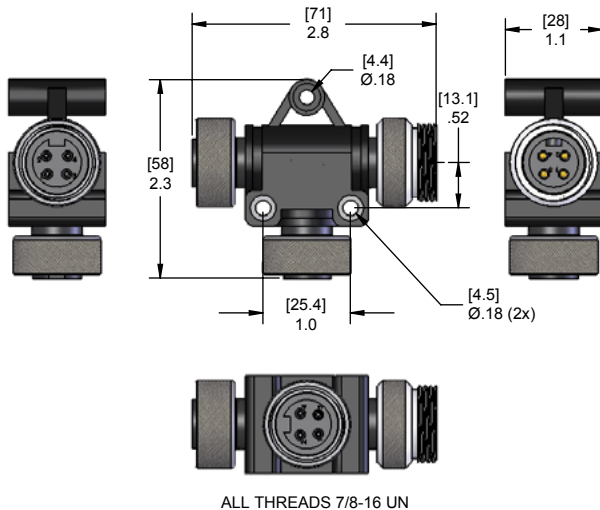

7/8"-16UN to 7/8"-16UN "T" Connector

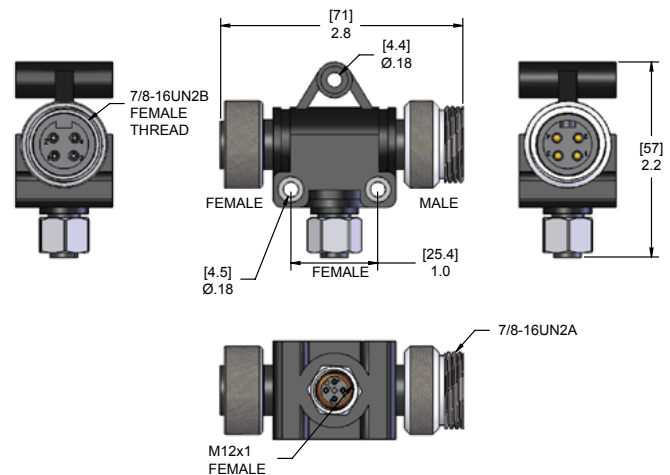

7/8"-16UN to M12 "T" Connector

### Specifications:

Body: Oil Resistant Yellow PVC  
Contacts: Copper Alloy with Gold Plating  
Coupling Nut: Stainless Steel  
Temperature: -40°C to +105°C (-40°F to +221°F)