| REVISIONS | | | |
|---|---|---|---|
| REV. | DESCRIPTION | DATE | APPROVED |
| A | DRAWN IN SW | 11/19/2014 | JJH |

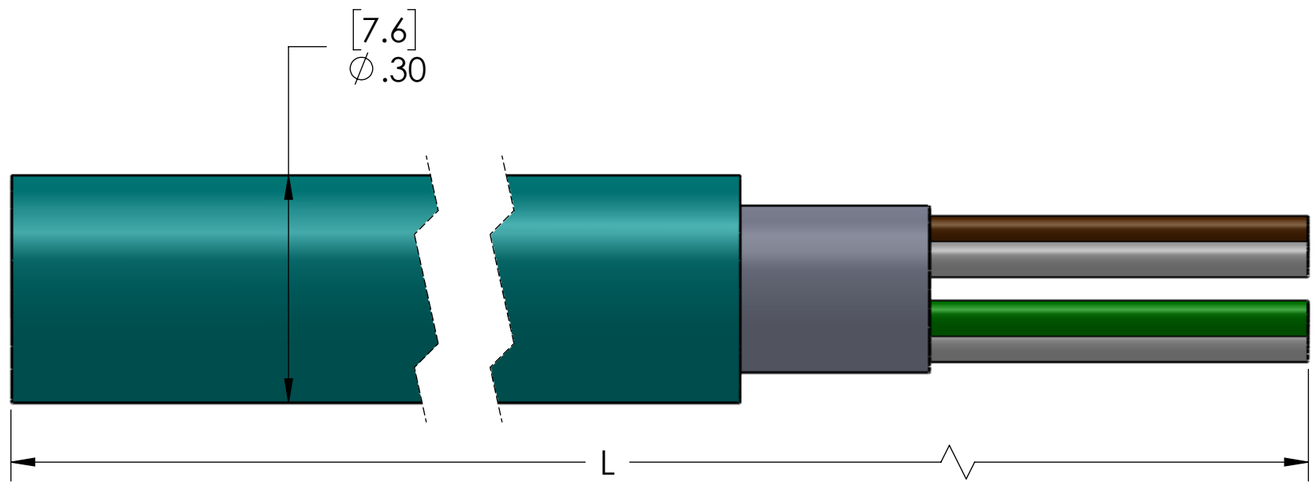


| SPECIFICATIONS: | |
|---|---|
| | |
| UL STYLE: | CMX / AWM 2463 |
| CABLE JACKET MATERIAL: | TPE- Teal |
| CABLE DIAMETER: | 0.30" [7.6mm] |
| COND. JACKET MATERIAL: | High density polyethylene |
| INS. COND. DIAMETER: | .048" [1.2mm] nom. |
| COND. STRANDING: | 24AWG - 7/32 Stranded tinned copper |
| PAIRING: | Blu x Wht/Blu, Org x Wht/Org, Grn x Wht/Grn, Brw x Wht/Brw |
| SHIELDS: | Tinned Copper Braid (75% Coverage) & foil polyester (100% Coverage) |
| WEIGHT: | Nom: 43#/Mft |
| RoHS?: | Yes |
| | |
| **ELECTRICAL REQUIREMENTS:** | |
| | |
| CAT 5e | |
| | |
| **MECHANICAL REQUIREMENTS:** | |
| | |
| EXTRUSION STYLE: | PRESSURE EXTRUSION |
| TEMPERATURE: | -40°C - +80°C |
| FLEX LIFE: | 1MM cycles @ 10x cable OD |
| | 10MM cycles @ 20x cable OD |

| TABLE A | |
|---|---|
| | |
| P/N | LENGTH |
| | |
| 60GSW01-0250 | 250' [76m] |
| 60GSW01-0500 | 500' [152m} |
| 60GSW01-1000 | 1000' [305m] |

Cable supplied on a single spool.
1 break allowed for lengths
of 1000' or more with no
piece being shorter than 250'

**PROPRIETARY AND CONFIDENTIAL**
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]

TEMPERATURE RANGE: -40°C - +80°C
MAX VOLTAGE: 600V
DO NOT SCALE DRAWING

| | NAME |
|---|---|
| DRAWN | JJH |
| CHECKED | |
| ENG APPR. | |
| MFG APPR. | |
| Q.A. | |
| COMMENTS: | |

MENCOM CORPORATION

TITLE:
4 PR. HIGH FLEX
ENET CABLE

| SIZE | DWG. NO. | REV |
|---|---|---|
| B | 60GSW01-ZZ | A |

SCALE: 5:1 | WEIGHT: | SHEET 1 OF 1