REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE IN SW	6/5/2006	

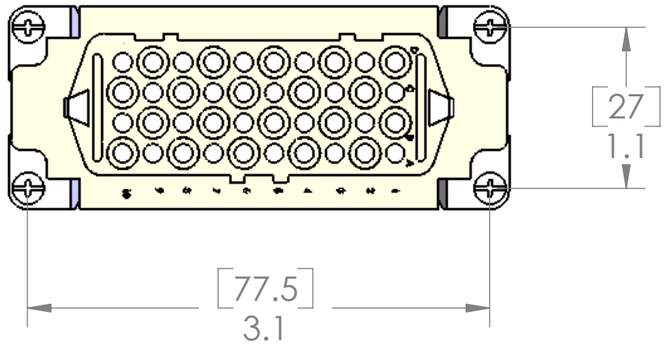

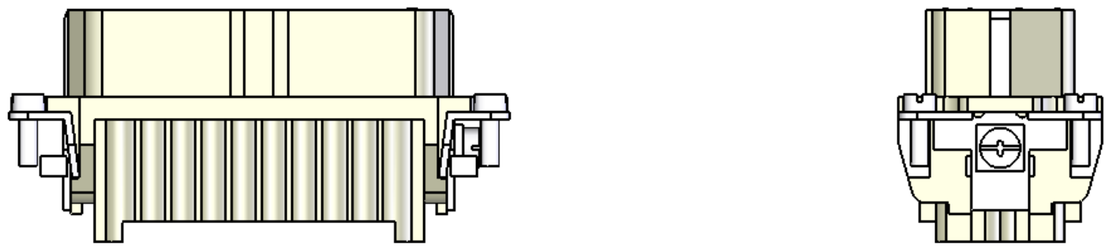

FEMALE CRIMP CONTACTS	SILVER PLATED	GOLD PLATED
22-26 AWG [0.34 sqmm]	CDFA-0.3	CDFD-0.3
20 AWG [0.5 sqmm]	CDFA-0.5	CDFD-0.5
18 AWG [0.75 - 1.0 sqmm]	CDFA-1.0	CDFD-1.0
16 AWG [1.5 sqmm]	CDFA-1.5	CDFD-1.5
14 AWG [2.5sqmm]	CDFA-2.5	CDFD-2.5

MATERIALS	
HOUSING:	GLASS REINFORCED THERMOPLASTIC
	NICKEL PLATED BRASS HARDWARE
SCREWS:	NICKEL PLATED BRASS
RATINGS:	UL - 600V, 10A. EN 250V/4kV/3, 10A
APPROVALS:	UL & CSA

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES AND [MM]

MATERIAL

FINISH

DO NOT SCALE DRAWING

	NAME
DRAWN	CAM
CHECKED	
ENG APPR.	
MFG APPR.	
Q.A.	
COMMENTS:	

MENCOM CORPORATION

TITLE:

10A, 600V, 40 PIN CRIMP FEMALE CONNECTOR

SIZE	DWG. NO.	REV
B	CDF-40	A

SCALE: 1:1	WEIGHT:	SHEET 1 OF 1