
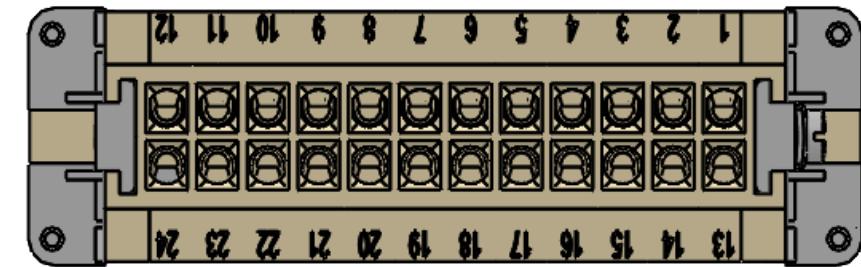
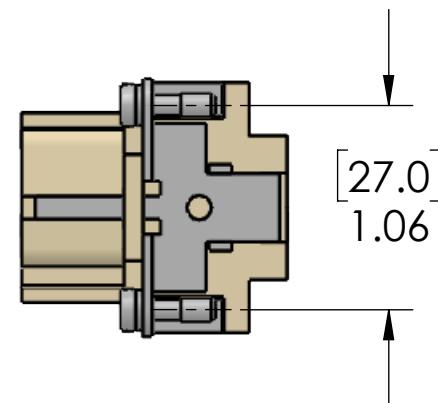


8 7 6 5 4 3 2 1


D

D

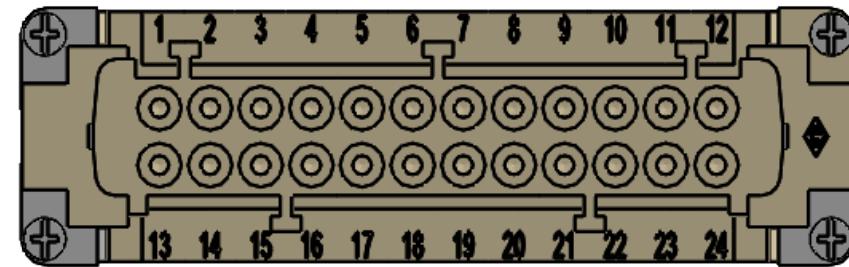

C

C

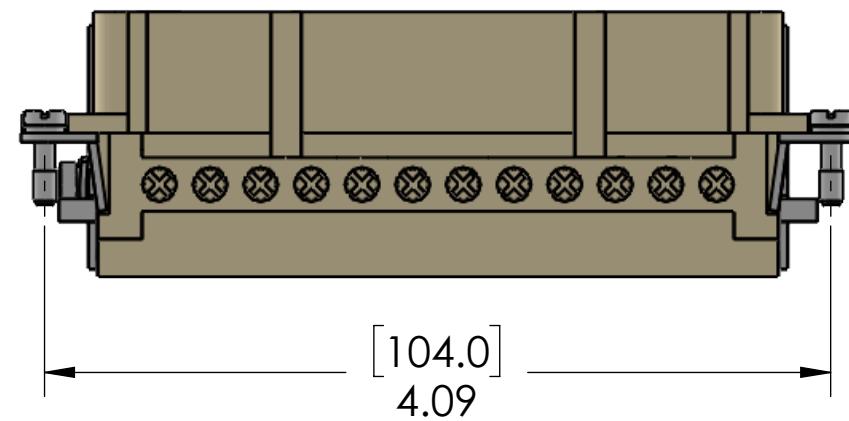

| MATERIALS | |
|--------------|------------------------------------|
| HOUSING: | GLASS REINFORCED THERMOPLASTIC |
| | NICKEL PLATED BRASS HARDWARE |
| SCREWS: | NICKEL PLATED BRASS |
| RATINGS: | UL - 600V, 16A. EN 500V/6kV/3, 16A |
| WIRE AWG | 12 - 20AWG [4 - 0.5 sqmm] |
| STRIP LENGTH | 7 MM |
| SCREW TORQUE | 0.5 Nm (4.4 LB.IN.) |
| APPROVALS: | UL & CSA |

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

| | | | | | | |
|---|------------|------------|--------------|--|--------------------|--|
| UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MM] | DRAWN BY | ADM | MATERIAL | | MENCOM CORPORATION | |
| | DRAWN DATE | 09/22/2016 | | | | |
| | CHECKED BY | | | | | |
| | CHECK DATE | | | | | |
| | | | | | | |
| | | | | | | |
| COMMENTS: | | | DWG. NO. | | REV | |
| SIZE | | CNEF-24T | B | | B | |
| SCALE: 1:1 | | WEIGHT: | SHEET 1 OF 1 | | | |

8 7 6 5 4 3 2 1

A