

8 7 6 5 4 3 2 1

20 40 50

THESE INSERTS ARE BLACK TO COUPLE WITH THE WHITE CPM-06 INSERTS FOR WIRING PURPOSES FOR THE 12 POLE CONFIGURATION.

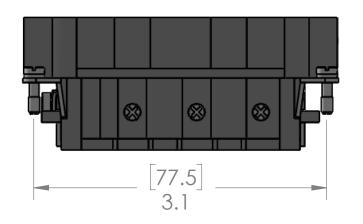



MATERIALS	
HOUSING:	GLASS REINFORCED THERMOPLASTIC
	NICKEL PLATED BRASS HARDWARE
SCREWS:	NICKEL PLATED BRASS
CONTACTS:	SILVER PLATED COPPER ALLOY
RATINGS:	UL - 600V, 35A. EN 400/690V/6kV/3, 35A
APPROVALS:	UL, CSA, & CCC

		UNLESS OTHERWISE SPECIFIED: DRAWN BY ADM						
		DIMENSIONS ARE IN INCHES	DRAWN DATE	09/22/2016	MENCOM CORPORATION			4
		AND [MM]	CHECKED BY		TITLE: 6 PL MALE SCREW INSERT 35,			
	R ®	S	CHECK DATE				DT 2E A A A D	,
	c 74 us				OFL	(1 33AMF		
PROPRIETARY AND CONFIDENTIAL					BLK			
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.		MATERIAL	COMMENTS:		B DWG. NO.		R	REV
		FINISH					A	
		DO NOT SCALE DRAWING			SCALE: 1:1	WEIGHT:	SHEET 1 C	OF 1

7 6 5 4 3