




8 7 6 5 4 3 2 1

D

C

B

A

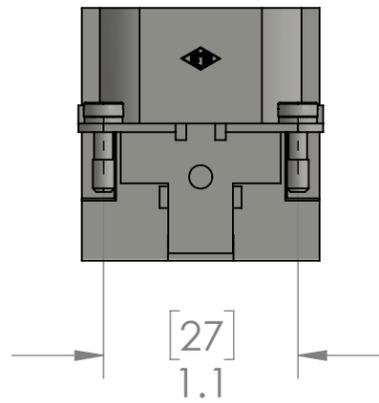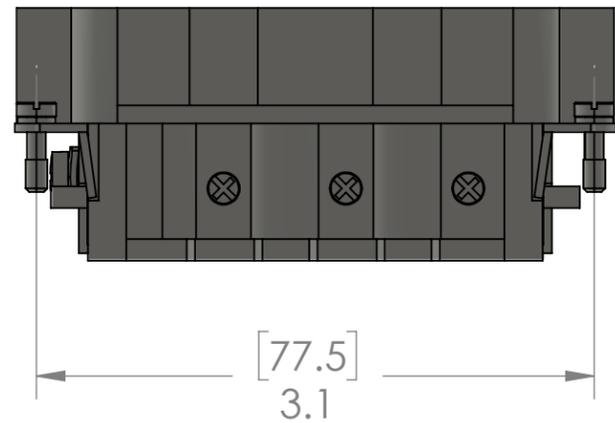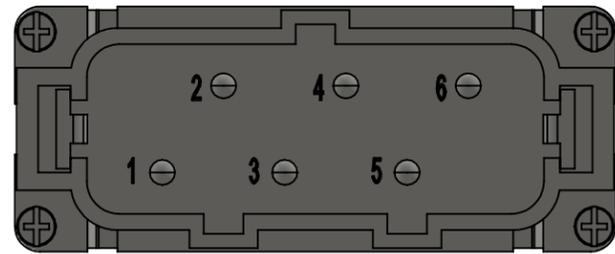

SCREW INSERTS WITHOUT PLATE FOR SECTION CONDUCTORS

MATERIALS	
HOUSING:	GLASS REINFORCED THERMOPLASTIC
	NICKEL PLATED BRASS HARDWARE
SCREWS:	NICKEL PLATED BRASS
CONTACTS:	SILVER PLATED COPPER ALLOY
RATINGS:	UL - 600V, 35A. EN 400/690V/6kV/3, 35A
APPROVALS:	UL, CSA, & CCC

**PROPRIETARY AND CONFIDENTIAL**  
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.



UNLESS OTHERWISE SPECIFIED:	DRAWN BY	DCG
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN DATE	03/14/2023
	CHECKED BY	JJH
	CHECK DATE	03/14/2023
	COMMENTS:	
MATERIAL		
FINISH		
DO NOT SCALE DRAWING		

MENCOM CORPORATION		
TITLE: 6 PL MALE SCREW INSERT 35AMP W/O WP		
SIZE <b>B</b>	DWG. NO. CPM-06X	REV <b>A</b>
SCALE: 1:1	WEIGHT:	SHEET 1 OF 1

8 7 6 5 4 3 2 1

D

C

B

A