
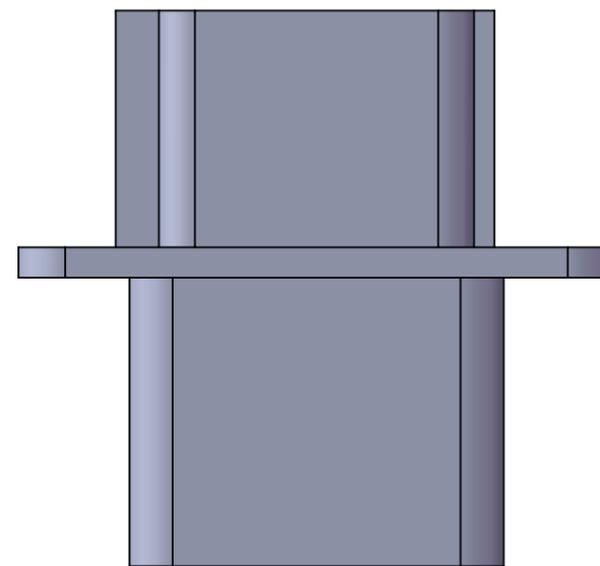


CONTACT SIDE

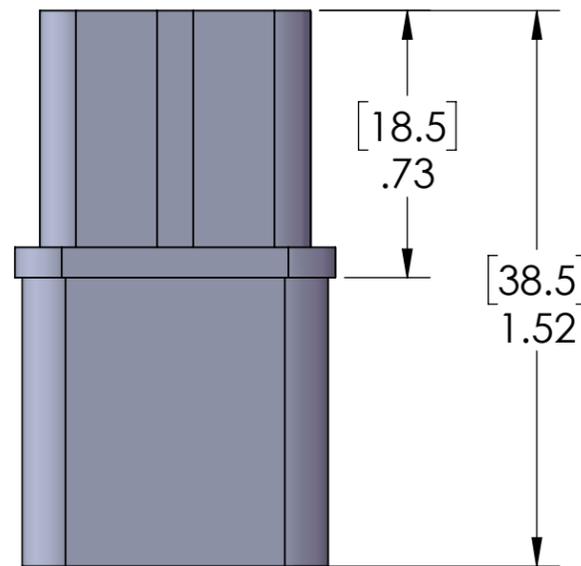

FOR USE WITH FEMALE CONTACTS - SOLD SEPARATELY

SILVER PLATED	GOLD PLATED	AWG
CCFA-0.3	CCFD-0.3	26 -22
CCFA-0.5	CCFD-0.5	20
CCFA-1.0	CCFD-1.0	18
CCFA-1.5	CCFD-1.5	16
CCFA-2.5	CCFD-2.5	14
CCFA-3.0	CCFD-3.0	12
CCFA-4.0	CCFD-4.0	12

HOUSING CHARACTERISTICS	
BODY:	SELF-EXTINGUISHING THERMOPLASTIC RESIN
RATED VOLTAGE: UL/CSA:	600V
EN 61984:	16A 500V 6kV 3
AMBIENT TEMP LIMIT:	-40 C...+125 C
MECHANICAL LIFE:	500 CYCLES

UNLESS OTHERWISE SPECIFIED:	
DRAWN BY	DCG
DRAWN DATE	05/24/2018
CHECKED BY	ADM
CHECK DATE	05/24/2018

MATERIAL	
FINISH	
DO NOT SCALE DRAWING	

MENCORP CORPORATION		
TITLE:		
SIZE	DWG. NO.	REV
<b>B</b>	CQF-08	<b>A</b>
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1

**PROPRIETARY AND CONFIDENTIAL**  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCORP CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCORP CORPORATION IS PROHIBITED.