REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	redrawn in sw	5/25/2016	BEM

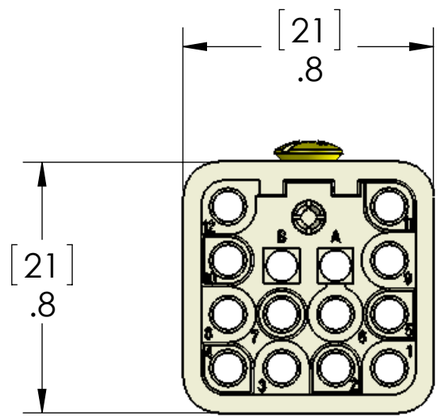

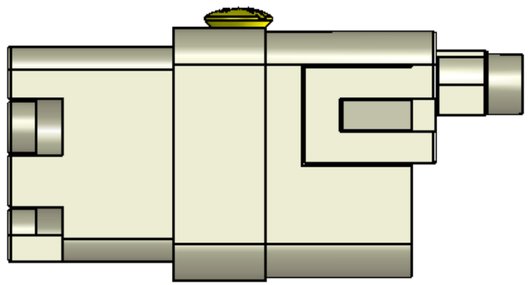



CRIMP PINS ORDERED SEPERATELY	
CRIMP PIN P/N	WIRE AWG
CDFA-0.3	22-26
CDFA-0.5	18-20
CDFA-1.0	18
CDFA-1.5	16
CDFA-2.5	14

MATERIALS	
HOUSING:	GLASS REINFORCED THERMOPLASTIC
	NICKEL PLATED BRASS HARDWARE
SCREWS:	NICKEL PLATED BRASS
RATINGS:	UL/CSA - 600V, 10A. EN 400V/6kV/2, 10A
APPROVALS:	UL & CSA

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL ±1/64
ANGULAR: MACH ±5° BEND ±5°
TWO PLACE DECIMAL ±.01
THREE PLACE DECIMAL ±.004

MATERIAL

FINISH

DO NOT SCALE DRAWING

	NAME
DRAWN	DCG
CHECKED	
ENG APPR.	
MFG APPR.	
Q.A.	

COMMENTS:

MENCOM CORPORATION

TITLE:

SIZE B | DWG. NO. CQF-12 | REV A

SCALE: 2:1 | WEIGHT: | SHEET 1 OF 1