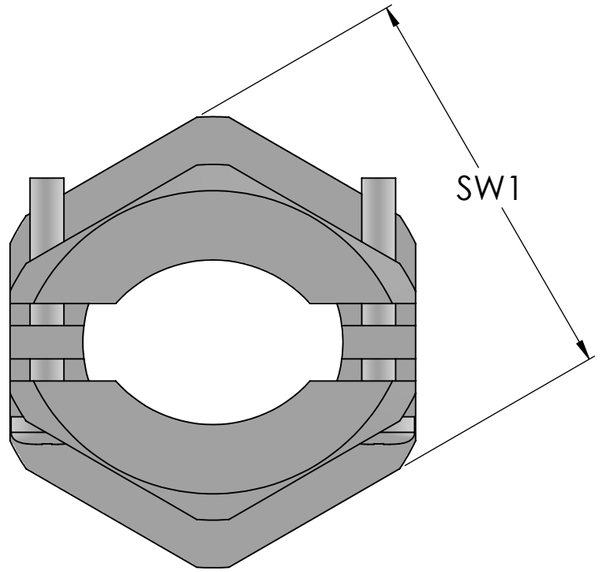

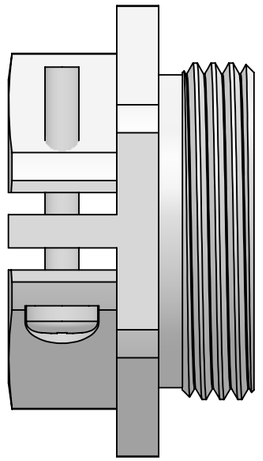

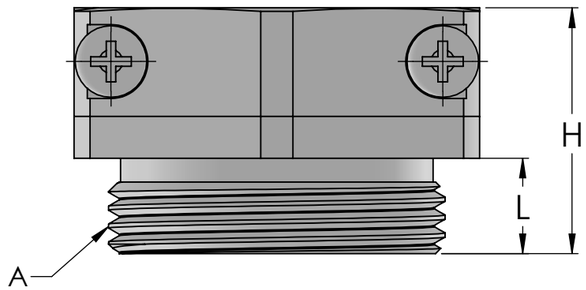

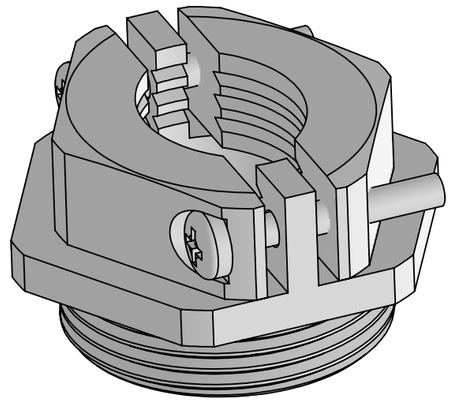

Connecting thread standard length				
PART #	A	L	SW1	H
CRSX-09	PG 9	6	17	16.3
CRSX-11	PG 11	6	20	17.3
CRSX-13.5	PG 13.5	6.5	22	17.6
CRSX-16	PG 16	7	24	18.2
CRSX-21	PG 21	8	30	21
CRSX-29	PG 29	8.5	40	21.8

MATERIALS	
PRESSURE SCREW:	BRASS CuZn39Pb3, NICKEL-PLATED
BOLTS:	STAINLESS STEEL
GLAND BODY:	BRASS CuZn39Pb3, NICKEL-PLATED
CONNECTING THREAD:	PG AS PER DIN 40430
PROPERTIES	
TEMPERATURE RANGE:	(-30 °C - +100 °C) (-22 °F - +212 °F)

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]

MATERIAL

FINISH

DO NOT SCALE DRAWING

DRAWN BY	DCG
DRAWN DATE	08/19/2021
CHECKED BY	APR
CHECK DATE	08/19/2021

COMMENTS:

MENCOM CORPORATION

TITLE:

PG SERIES CLAMPING METAL CABLE GLAND

SIZE	DWG. NO.	REV
B	CRSX-ZZ	A

SCALE: 2:1 | WEIGHT: | SHEET 1 OF 1