



(2X)USB 3.0 TYPE A CONFIGURED  
FEMALE EXTERIOR / FEMALE INTERIOR

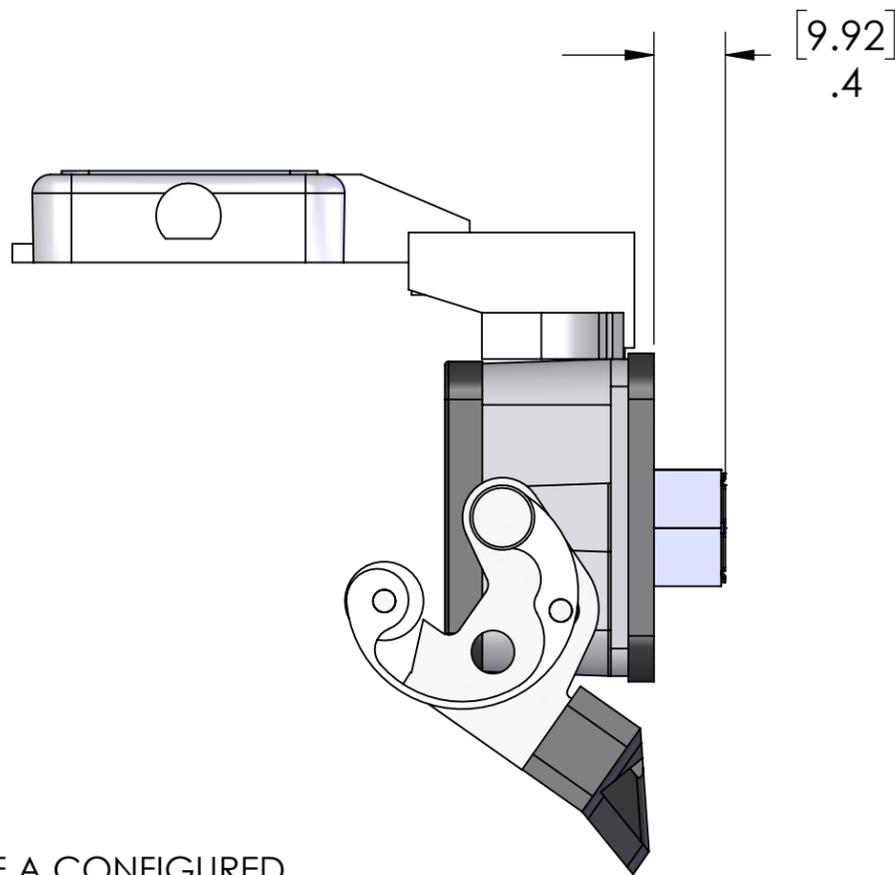

PANEL CUTOUT

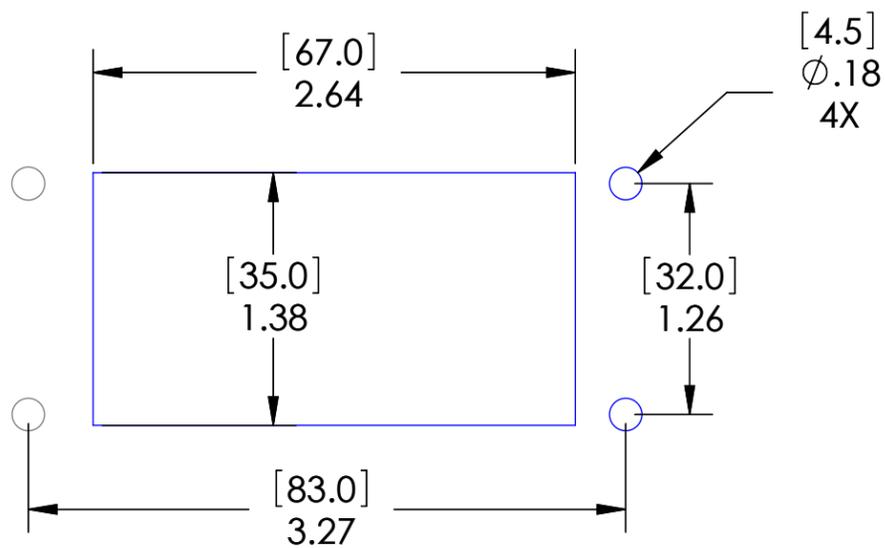

OPERATING TEMPERATURE: (-30°C / +87° C (-22° F / +188° F))

MOUNTING KIT ORDERED SEPARATELY CONTAINS M4X0.7 SS SCREW, NYLON WASHER, SPLIT LOCKWASHER AND M4 NUT  
P/N: D-PIC-MT

**PROPRIETARY AND CONFIDENTIAL**  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.



UNLESS OTHERWISE SPECIFIED:  
DIMENSIONS ARE IN INCHES AND [MM]

HOUSING MATERIALS	
BODY:	EPOXY COATED DIE CAST ALUMINUM
GASKET:	THERMOPLASTIC ELASTOMER
HANDLE:	POLYAMIDE
LEVERS:	STAINLESS STEEL

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

PIC RATINGS/SPECIFICATIONS	
NEMA/UL   EN 60529:	4, 4X, 12   IP65
MOUNTING SCREW SIZE:	M4 (8-32) (304 or 316SS for 4X)
MOUNTING SCREW TORQUE:	1.2~1.8N-m (0.9~1.3 Lb-Ft)

DRAWN BY:	ADM
DRAWN DATE:	07/13/2021
CHECKED BY:	DCG
CHECK DATE:	07/15/2021
COMMENTS:	
MATERIAL:	
FINISH:	
DO NOT SCALE DRAWING	

MENCOM CORPORATION		
TITLE: 2 USB-AA; 10		
SIZE <b>B</b>	DWG. NO. D-2USB-AFAF-10	REV <b>C</b>
SCALE: 1:1	WEIGHT:	SHEET 1 OF 1