


PANEL CUTOUT

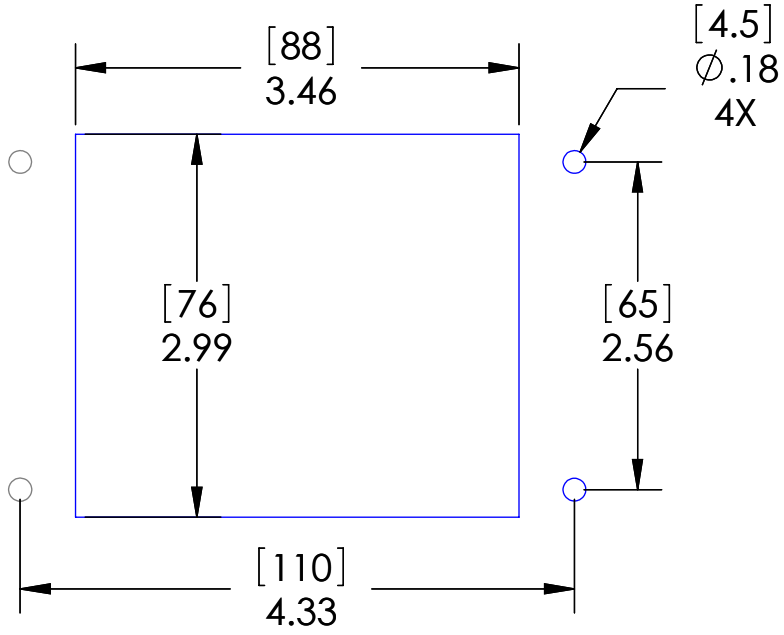

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

STANDARD CONFIGURATIONS UNLESS OTHERWISE NOTED		
CONN. TYPE	EXTERIOR	INTERIOR
RJ45	CAT 6 JACK	CAT 6 JACK
RCA	JACK	JACK

MOUNTING KIT ORDERED SEPARATELY CONTAINS M4X0.7 SS SCREW, NYLON WASHER, SPLIT LOCKWASHER AND M4 NUT  
**P/N: D-PIC-MT**

**PROPRIETARY AND CONFIDENTIAL**  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

HOUSING MATERIALS	
BODY:	EPOXY COATED DIE CAST ALUMINUM
GASKET:	THERMOPLASTIC ELASTOMER
HANDLE:	POLYAMIDE
LEVERS:	STAINLESS STEEL

PIC RATINGS/SPECIFICATIONS	
NEMA/UL   EN 60529:	4, 4X, 12   IP65
MOUNTING SCREW SIZE:	M4 (8-32) (304 or 316SS for 4X)
MOUNTING SCREW TORQUE:	1.2~1.8N-m (0.9~1.3 Lb-Ft)

ED S ON WASHER, ID M4 NUT		UNLESS OTHERWISE SPECIFIED:		DRAWN BY		ADM	
		DIMENSIONS ARE IN INCHES AND [MM]		DRAWN DATE		07/19/2021	
				CHECKED BY		APR	
				CHECK DATE		07/19/2021	
		MATERIAL		COMMENTS:			
		FINISH					
		DO NOT SCALE DRAWING					

MENCOM CORPORATION		
TITLE: RCA X 4; 4JR45; 32		
SIZE <b>B</b>	DWG. NO. D-4RJ45-4RCA-32	REV <b>C</b>
SCALE: 2:3	WEIGHT:	SHEET 1 OF 1