


—USB 3.0 TYPE A CONFIGURED
FEMALE EXTERIOR / FEMALE INTERIOR

PANEL CUTOUT

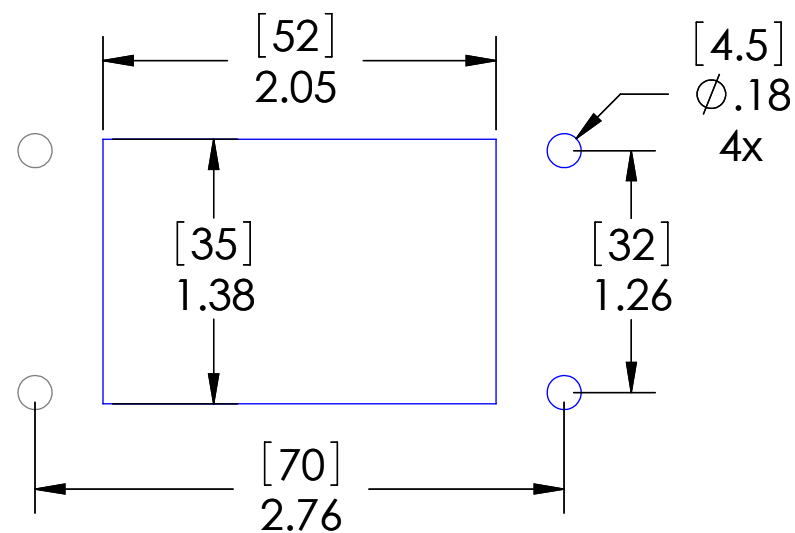

HOUSING MATERIALS	
BODY:	NICKEL PLATED ZINC
GASKETS:	PUR FIPG
FRONT COVER:	POLYCARBONATE
LATCH & LOCK:	PBT
BACK COVER:	POLYPROPYLENE

OPERATING TEMPERATURE: (-10°C / +80° C (+14° F / +176° F))

MOUNTING KIT ORDERED
SEPARATELY CONTAINS
M4x0.7 SS SCREW, NYLON WASHER,
SPLIT LOCKWASHER AND M4 NUT
P/N: D-PIC-MT



UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
AND [MM]

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

		MATERIAL
		FINISH
		DO NOT SCALE DRAWING

PIC RATINGS/SPECIFICATIONS	
NEMA/UL EN 60529:	4, 4X, 12 IP65
MOUNTING SCREW SIZE:	M5 (10-32) (304 or 316SS for 4X)
MOUNTING SCREW TORQUE:	1.2~1.8N·m (0.9~1.3 Lb·Ft)

DRAWN BY	GO	<h1 style="text-align: center;">MENCOM CORPORATION</h1> <p style="text-align: center;">TITLE:</p> <h2 style="text-align: center;">USB-AA; 06</h2>		
DRAWN DATE	12/11/2018			
CHECKED BY	DCG			
CHECK DATE	12/11/2018			
COMMENTS:		SIZE	DWG. NO.	REV
		B	D-USB-AFAF-06	B
		SCALE: 1:1	WEIGHT:	SHEET 1 OF 1