


— AUSTRALIA, NEW ZEALAND 15A-250V TYPE I OUTLET
AS/NZS 3112, AS/NZS 4417, (AU2-15R)
NOTE: OUTLET ACCEPTS 10A and 15A
AUSTRALIAN / NEW ZEALAND PLUGS

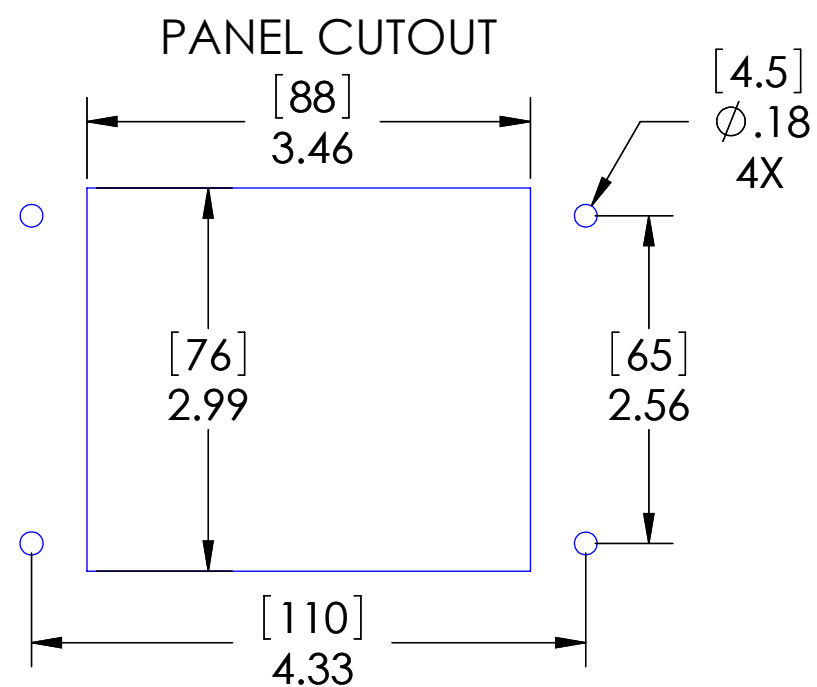

	HOUSING MATERIALS
BODY:	EPOXY COATED DIE CAST ALUMINUM
GASKET:	THERMOPLASTIC ELASTOMER
HANDLE:	POLYAMIDE
LEVERS:	STAINLESS STEEL

OPERATING TEMPERATURE: (-5°C / +50° C (+23° F / +122°) F)

MOUNTING KIT ORDERED
SEPARATELY CONTAINS
M4x0.7 SS SCREW, NYLON WASHER,
SPLIT LOCKWASHER AND M4 NUT
P/N: D-PIC-MT

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
AND [MM]

	MATERIAL
--	----------

DO NOT SCALE DRAWING

PIC RATINGS/SPECIFICATIONS	
VOLTS:	250V
AMPS:	15A
SCCR:	10kA
NEMA/UL EN 60529:	4, 4X, 12 IP65
MOUNTING SCREW SIZE:	M4 (8-32) (304 or 316SS for 4X)
MOUNTING SCREW TORQUE:	1.2~1.8N-m (0.9~1.3 Lb-Ft)
INCOMING POWER WIRE SIZE:	0.5 ~ 4.0 sq mm / 20-12AWG
WIRE STRIP LENGTH:	10 ~ 11 mm

A device employing a 15 A or 20 A grounding type receptacle but no supplementary protector shall be protected by a fuse or circuit breaker that does not exceed the marked rating of the receptacle in the end use. When a fuse or circuit breaker rated less than the receptacle's rating is provided, a Marking shall be provided to indicate the maximum ampere rating of the protection provided.

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

D:	DRAWN BY	ADM	<div style="text-align: center;"> <h1>MENCOM CORPORATION</h1> <h2>TITLE:</h2> <h3>AUS 15A RCPT; 32</h3> </div>		
	DRAWN DATE	09/09/2024			
	CHECKED BY	RP			
	CHECK DATE	09/09/2024			
	COMMENTS:		SIZE	DWG. NO.	REV
			B	DAS-32	D
			SCALE: 2:3	WEIGHT:	SHEET 1 OF 1