

8 7 6 5 4 3 2 1

D

C

B



A

D


C

B

A

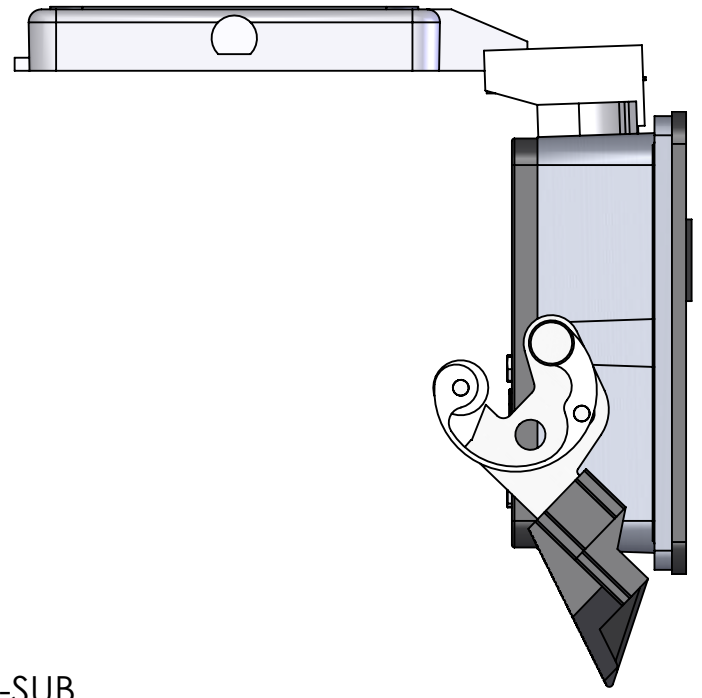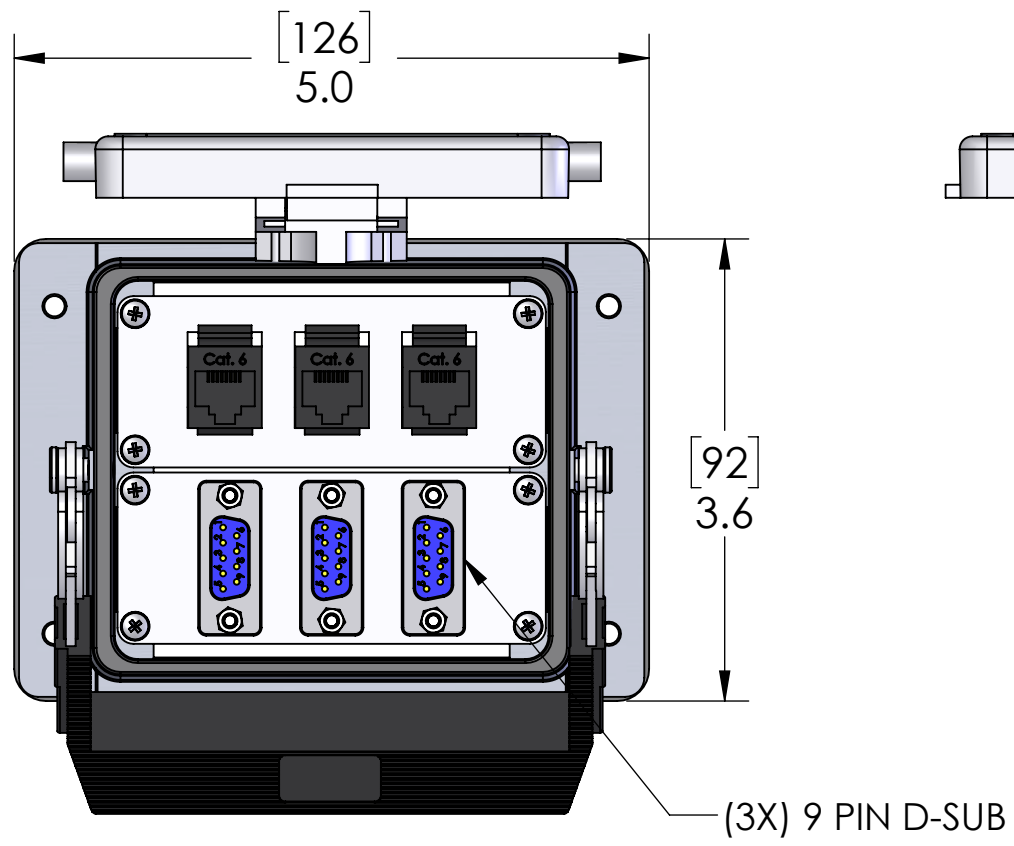

PANEL CUTOUT

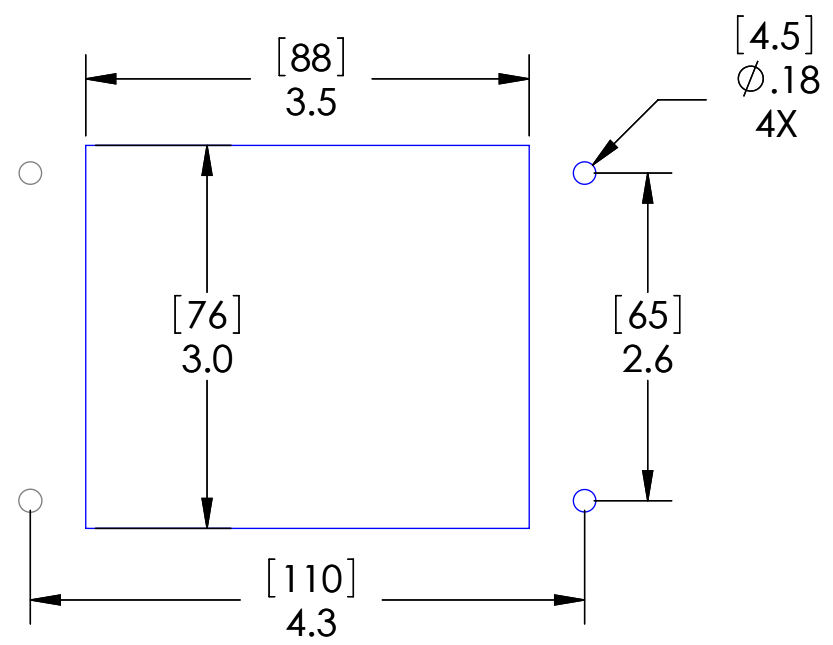

STANDARD CONFIGURATIONS UNLESS OTHERWISE NOTED		
CONN. TYPE	EXTERIOR	INTERIOR
RJ45	CAT. 6 JACK	CAT. 6 JACK
ALL D-SUBS	FEMALE	MALE

OPERATING TEMPERATURE: (-10°C / +60° C (+14° F / +140° F))

MOUNTING KIT ORDERED SEPARATELY CONTAINS M4x0.7 SS SCREW, NYLON WASHER, SPLIT LOCKWASHER AND M4 NUT

P/N: D-PIC-MT



PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

HOUSING MATERIALS	
BODY:	EPOXY COATED DIE CAST ALUMINUM
GASKET:	THERMOPLASTIC ELASTOMER
HANDLE:	POLYAMIDE
LEVERS:	STAINLESS STEEL
UNLESS OTHERWISE SPECIFIED:	
DIMENSIONS ARE IN INCHES AND [MM]	
MATERIAL	
FINISH	
DO NOT SCALE DRAWING	

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

PIC RATINGS/SPECIFICATIONS				
NEMA/UL EN 60529:		4, 4X, 12 IP65		
MOUNTING SCREW SIZE:		M4 (8-32) (304 or 316SS for 4X)		
MOUNTING SCREW TORQUE:		1.2~1.8N-m (0.9~1.3 Lb-Ft)		
INCOMING POWER WIRE SIZE:		0.5 ~ 4.0 sq mm / 20-12AWG		
DRAWN BY	GO	MENCOM CORPORATION		
DRAWN DATE	07/13/2021			
CHECKED BY	DCG			
CHECK DATE	07/15/2021			
COMMENTS:		TITLE: DB9 X 3; 3RJ45; 32		
		SIZE	DWG. NO.	REV
		B	DB09-3-3RJ45-32	E
		SCALE: 2:3	WEIGHT:	SHEET 1 OF 1