


PANEL CUTOUT

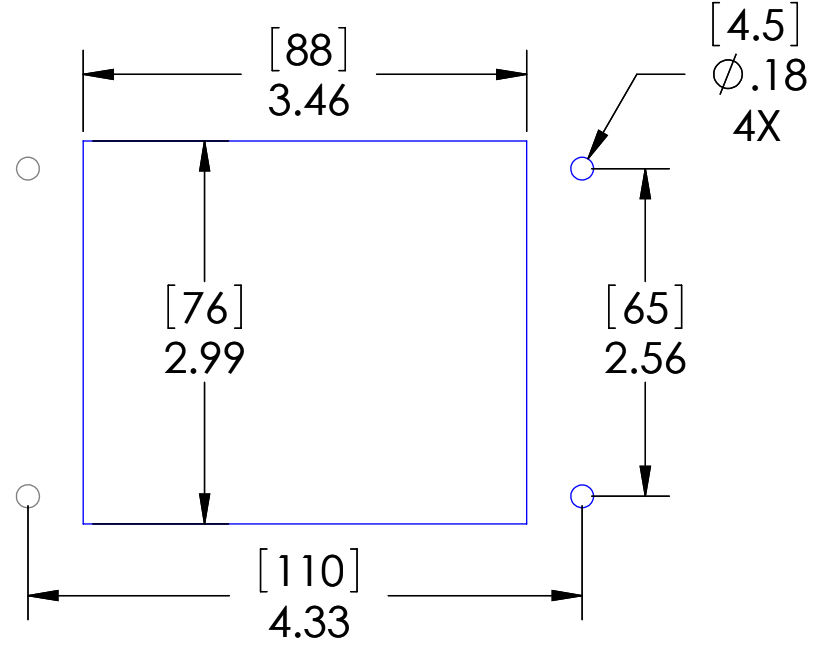

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

HOUSING MATERIALS		PIC RATINGS/SPECIFICATIONS	
BODY:	EPOXY COATED DIE CAST ALUMINUM	NEMA/UL EN 60529:	4, 4X, 12 IP65
GASKET:	THERMOPLASTIC ELASTOMER	MOUNTING SCREW SIZE:	M4 (8-32) (304 or 316SS for 4X)
HANDLE:	POLYAMIDE	MOUNTING SCREW TORQUE:	1.2~1.8N-m (0.9~1.3 Lb-Ft)
LEVERS:	STAINLESS STEEL		

MOUNTING KIT ORDERED SEPARATELY CONTAINS M4x0.7 SS SCREW, NYLON WASHER, SPLIT LOCKWASHER AND M4 NUT
P/N: D-PIC-MT



UNLESS OTHERWISE SPECIFIED:		DRAWN BY	DCG
DIMENSIONS ARE IN INCHES AND [MM]		DRAWN DATE	01/10/2019
		CHECKED BY	DCG
		CHECK DATE	01/10/2019
		COMMENTS:	
MATERIAL			
FINISH			
DO NOT SCALE DRAWING			

MENCOM CORPORATION		
TITLE: SZ32; DB9; HDDB15; RJ45; USB		
SIZE	DWG. NO.	REV
B	DB09-DDB15-USB-RJ45-6M2-32	D
SCALE: 2:3	WEIGHT:	SHEET 1 OF 1

STANDARD CONFIGURATIONS UNLESS OTHERWISE NOTED		
CONN. TYPE	EXTERIOR	INTERIOR
RJ45	CAT. 6 JACK	CAT. 6 JACK
ALL D-SUBS	FEMALE	MALE

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.