


9 PIN D-SUB CONFIGURED
FEMALE EXTERIOR /
FEMALE INTERIOR
8 PIN MIN CONFIGURED
FEMALE EXTERIOR /
FEMALE INTERIOR

PANEL CUTOUT

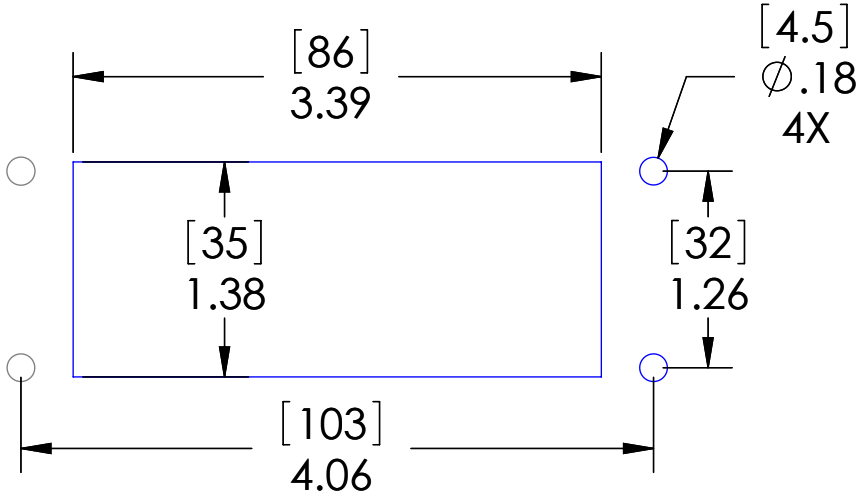

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

HOUSING MATERIALS	
BODY:	EPOXY COATED DIE CAST ALUMINUM
GASKET:	THERMOPLASTIC ELASTOMER
HANDLE:	POLYAMIDE
LEVERS:	STAINLESS STEEL

PIC RATINGS/SPECIFICATIONS			
NEMA/UL EN 60529:	4, 4X, 12 IP65		
MOUNTING SCREW SIZE:	M4 (8-32) (304 or 316SS for 4X)		
MOUNTING SCREW TORQUE:	1.2~1.8N-m (0.9~1.3 Lb-Ft)		

OPERATING TEMPERATURE: (-25°C / +85° C (+13° F / +185° F))

MOUNTING KIT ORDERED SEPARATELY CONTAINS M4x0.7 SS SCREW, NYLON WASHER, SPLIT LOCKWASHER AND M4 NUT
P/N: D-PIC-MT



PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

		UNLESS OTHERWISE SPECIFIED:
		DIMENSIONS ARE IN INCHES AND [MM]
		MATERIAL
		FINISH
		DO NOT SCALE DRAWING

DRAWN BY	ADM
DRAWN DATE	07/14/2021
CHECKED BY	DCG
CHECK DATE	07/16/2021

MENCOM CORPORATION
TITLE:
DB09F; 8M; 16

SIZE	DWG. NO.	REV
B	DB09F-8M-16LS	C
SCALE: 13:16	WEIGHT:	SHEET 1 OF 1