



9 PIN D-SUB CONFIGURED  
FEMALE EXTERIOR/ FEMALE INTERIOR

PANEL CUTOUT

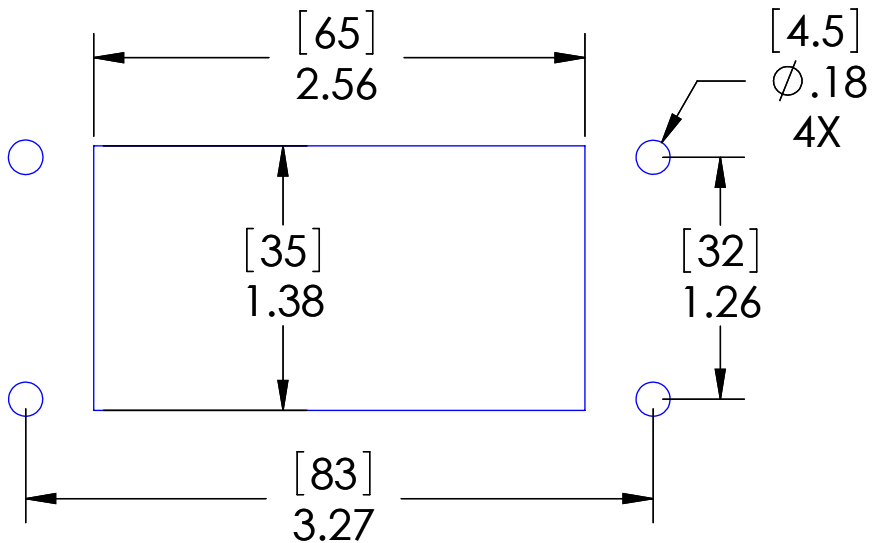

MOUNTING KIT ORDERED  
SEPARATELY CONTAINS  
M4X0.7 SS SCREW, NYLON WASHER,  
SPLIT LOCKWASHER AND M4 NUT  
**P/N: D-PIC-MT**

HOUSING MATERIALS		PIC RATINGS/SPECIFICATIONS	
BODY:	EPOXY COATED DIE CAST ALUMINUM		
GASKET:	THERMOPLASTIC ELASTOMER	NEMA/UL   EN 60529:	4, 4X, 12   IP65
HANDLE:	POLYAMIDE	MOUNTING SCREW SIZE:	M5 (10-32) (304 or 316SS for 4X)
LEVERS:	STAINLESS STEEL	MOUNTING SCREW TORQUE:	1.2~1.8N-m (0.9~1.3 Lb-Ft)
<div>UNLESS OTHERWISE SPECIFIED:</div> <div><b>LISTED</b> ENCL. ACC. 5JR2</div> <div>DIMENSIONS ARE IN INCHES AND [MM]</div>		DRAWN BY	DCG
		DRAWN DATE	11/30/2018
		CHECKED BY	JJH
		CHECK DATE	11/30/2018
		MATERIAL	
		FINISH	
		DO NOT SCALE DRAWING	
		COMMENTS:	
		MENCOM CORPORATION	
		TITLE:	
		DB9 FF; RJ45; 10	
		SIZE	DWG. NO.
		<b>B</b>	DB09F-RJ45-10LS
		SCALE: 1:1	REV
		WEIGHT:	<b>B</b>
		SHEET 1 OF 1	

STANDARD CONFIGURATIONS UNLESS OTHERWISE NOTED		
CONN. TYPE	EXTERIOR	INTERIOR
RJ45	CAT 6 JACK	CAT 6 JACK

**PROPRIETARY AND CONFIDENTIAL**  
THE INFORMATION CONTAINED IN THIS  
DRAWING IS THE SOLE PROPERTY OF  
MENCOM CORPORATION. ANY  
REPRODUCTION IN PART OR AS A WHOLE  
WITHOUT THE WRITTEN PERMISSION OF  
MENCOM CORPORATION IS  
PROHIBITED.