

8

7

6

5

4

3

2

1

D

D

C




C

B

B

A

A

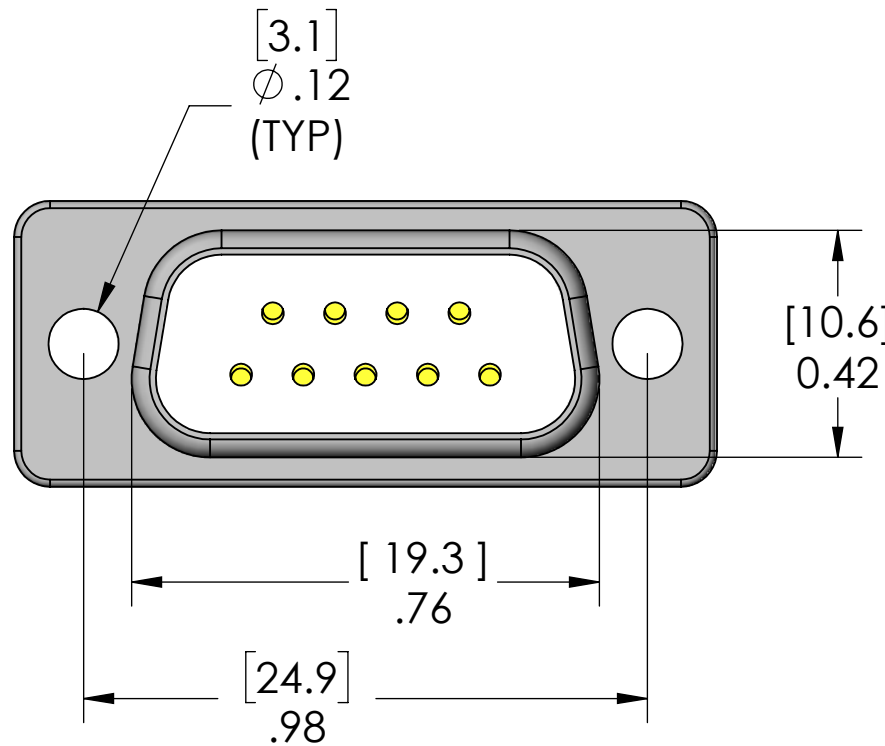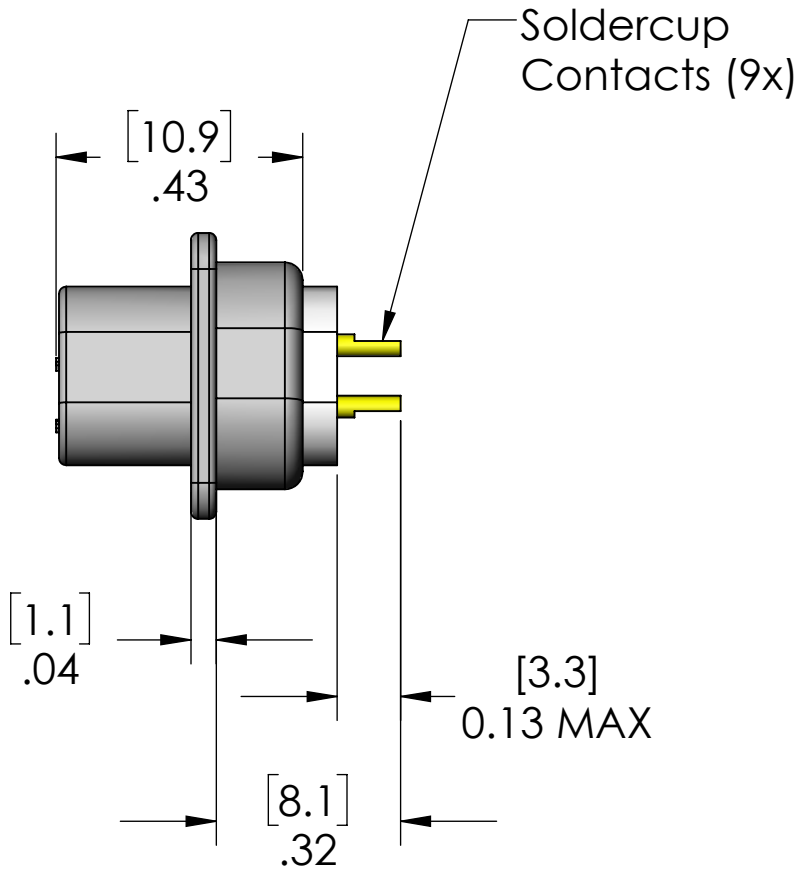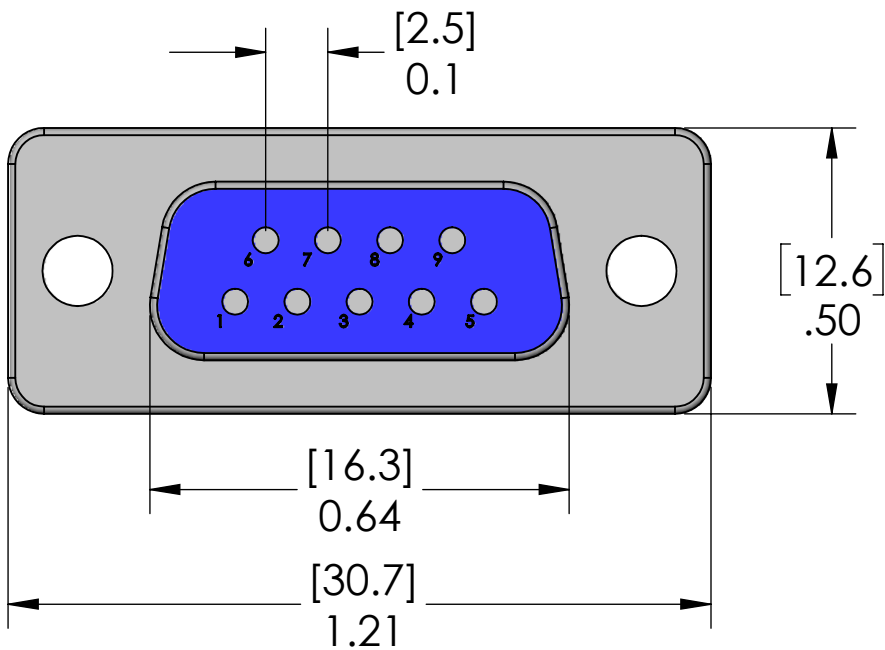

**PROPRIETARY AND CONFIDENTIAL**  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES AND [MM]

MATERIAL

FINISH

DO NOT SCALE DRAWING

SPECIFICATIONS

SHELL:	TIN PLATED
PIN CONTACT:	BRASS GOLD PLATED OVER NICKEL
INSULATOR:	PBT & GLASS-FIBER REINFORCED UL-94V-D
CURRENT RATING:	5 AMP max (restricted by wire size)
DIELECTRIC STRENGTH:	1000V FOR ONE MINUTE
INSULATOR RESISTANCE:	1000MΩ MIN. @ 500V DC
TEMPERATURE:	55° C ~ +105° C
WIRE:	20~28 AWG

DRAWN BY	DCG
DRAWN DATE	07/10/2018
CHECKED BY	
CHECK DATE	

COMMENTS:

MENCOM CORPORATION

TITLE:

DB09 FEMALE  
SOLDERCUP CONN

SIZE	DWG. NO.	REV
<b>B</b>	DB09FSC	<b>A</b>
SCALE: 3:1	WEIGHT:	SHEET 1 OF 1