


9 PIN D-SUB CONFIGURED
MALE EXTERIOR/ MALE INTERIOR

PANEL CUTOUT

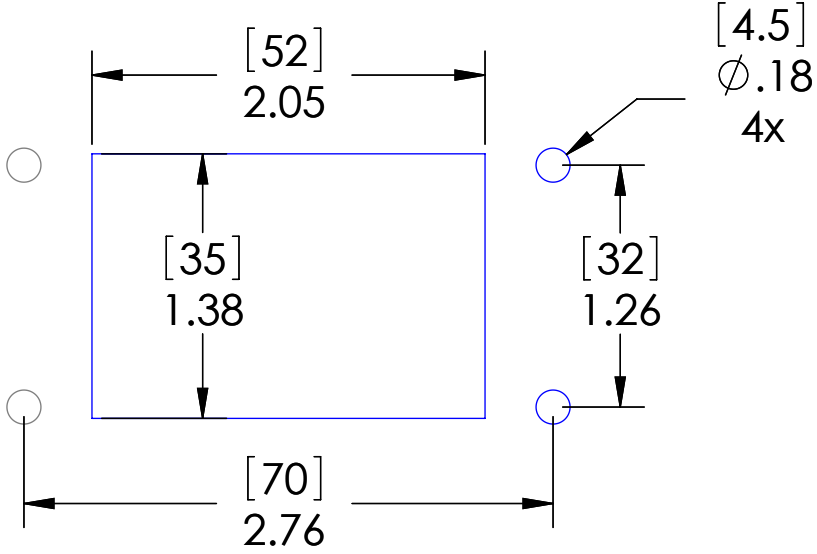

HOUSING MATERIALS	
BODY:	EPOXY COATED DIE CAST ALUMINUM
GASKET:	THERMOPLASTIC ELASTOMER
HANDLE:	POLYAMIDE
LEVERS:	STAINLESS STEEL

OPERATING TEMPERATURE: (-55°C / +105° C (-67° F / +221° F))

MOUNTING KIT ORDERED
SEPARATELY CONTAINS
M4x0.7 SS SCREW, NYLON WASHER,
SPLIT LOCKWASHER AND M4 NUT
P/N: D-PIC-MT



PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

		UNLESS OTHERWISE SPECIFIED:
		DIMENSIONS ARE IN INCHES AND [MM]
		MATERIAL
		FINISH
		DO NOT SCALE DRAWING

These devices shall be mounted on enclosures having adequate strength and
thickness and with adequate spacing provided. Seal rating is based on
mounting to a surface that is clean, flat and smooth.

PIC RATINGS/SPECIFICATIONS	
NEMA/UL EN 60529:	4, 4X, 12 IP65
MOUNTING SCREW SIZE:	M4 (8-32) (304 or 316SS for 4X)
MOUNTING SCREW TORQUE:	1.2~1.8N-m (0.9~1.3 Lb-Ft)

DRAWN BY	DCG
DRAWN DATE	07/14/2021
CHECKED BY	DCG
CHECK DATE	07/16/2021

COMMENTS:

MENCOM CORPORATION		
TITLE: 9 PIN DSUB M/M; 06		
SIZE B	DWG. NO. DB09M-06LS	REV B
SCALE: 1:1	WEIGHT:	SHEET 1 OF 1