


MALE 9 PIN D-SUB
W/ SOLDER CUP
CONNECTIONS ON BACK
(3X)

FEMALE 9 PIN D-SUB
W/ SOLDER CUP
CONNECTIONS ON BACK

SOLDER CUP
CONNECTIONS
ON EACH D-SUB

PANEL CUTOUT

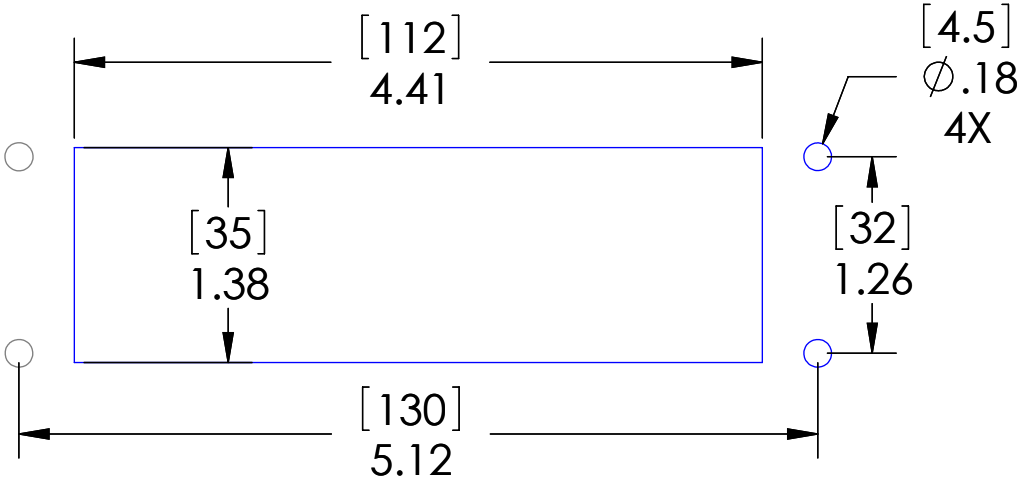

OPERATING TEMPERATURE: (-55°C / +105° C (-67° F / +221° F))
MOUNTING KIT ORDERED
SEPARATELY CONTAINS
M4x0.7 SS SCREW, NYLON WASHER,
SPLIT LOCKWASHER AND M4 NUT
P/N: D-PIC-MT

HOUSING MATERIALS	
BODY:	EPOXY COATED DIE CAST ALUMINUM
GASKET:	THERMOPLASTIC ELASTOMER
HANDLE:	POLYAMIDE
LEVERS:	STAINLESS STEEL

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

PIC RATINGS/SPECIFICATIONS	
NEMA/UL EN 60529:	4, 4X, 12 IP65
MOUNTING SCREW SIZE:	M4 (8-32) (304 or 316SS for 4X)
MOUNTING SCREW TORQUE:	1.2~1.8N-m (0.9~1.3 Lb-Ft)

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.



UNLESS OTHERWISE SPECIFIED:	
DIMENSIONS ARE IN INCHES AND [MM]	
MATERIAL	
FINISH	
DO NOT SCALE DRAWING	

DRAWN BY	ADM
DRAWN DATE	07/19/2021
CHECKED BY	APR
CHECK DATE	07/19/2021

COMMENTS:

MENCOM CORPORATION

TITLE:
DB9MSC 3; DB9FSC; 24

SIZE	DWG. NO.	REV
B	DB09MSC-3-DB9FSC-24LS	C
SCALE: 13:16	WEIGHT:	SHEET 1 OF 1