


PANEL CUTOUT

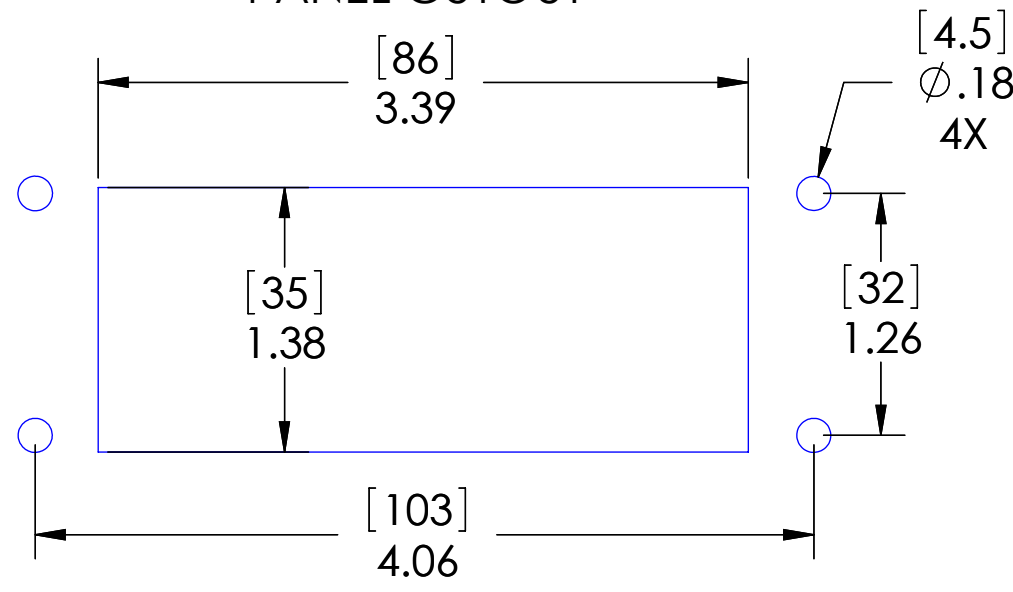

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

| HOUSING MATERIALS | | PIC RATINGS/SPECIFICATIONS | |
|-------------------|--------------------------------|----------------------------|---------------------------------|
| BODY: | EPOXY COATED DIE CAST ALUMINUM | | |
| GASKET: | THERMOPLASTIC ELASTOMER | NEMA/UL EN 60529: | 4, 4X, 12 IP65 |
| HANDLE: | POLYAMIDE | MOUNTING SCREW SIZE: | M4 (8-32) (304 or 316SS for 4X) |
| LEVERS: | STAINLESS STEEL | MOUNTING SCREW TORQUE: | 1.2~1.8N-m (0.9~1.3 Lb-Ft) |

MOUNTING KIT ORDERED SEPARATELY CONTAINS M4x0.7 SS SCREW, NYLON WASHER, SPLIT LOCKWASHER AND M4 NUT
P/N: D-PIC-MT



UNLESS OTHERWISE SPECIFIED:

| | |
|------------|------------|
| DRAWN BY | DCG |
| DRAWN DATE | 05/13/2020 |
| CHECKED BY | GO |
| CHECK DATE | 05/13/2020 |
| COMMENTS: | |

DIMENSIONS ARE IN INCHES AND [MM]

MATERIAL

FINISH

DO NOT SCALE DRAWING

| | | |
|---------------------------|-----------------------|-----------------|
| MENCOM CORPORATION | | |
| TITLE: DB25; 16 | | |
| SIZE B | DWG. NO. DB25-16LS | REV C |
| SCALE: 1:1 | WEIGHT: | SHEET 1 OF 1 |

| STANDARD CONFIGURATIONS UNLESS OTHERWISE NOTED | | |
|--|----------|----------|
| CONN. TYPE | EXTERIOR | INTERIOR |
| ALL D-SUBS | FEMALE | MALE |

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.