


USB 3.0 TYPE A CONFIGURED FEMALE EXTERIOR / FEMALE INTERIOR

DB9

FRANCE, BELGIUM CEE7/5, 16 AMPERE-250 VOLT TYPE E (FR1-16R) MODULAR OUTLET, SHUTTERED CONTACTS, 2 POLE-3 WIRE GROUNDING, 45mmX45mm SIZE. Note: All CEE7/7 European "SCHUKO" type plugs & power cords mate with France / Belgium outlets, sockets, connectors.

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

PANEL CUTOUT

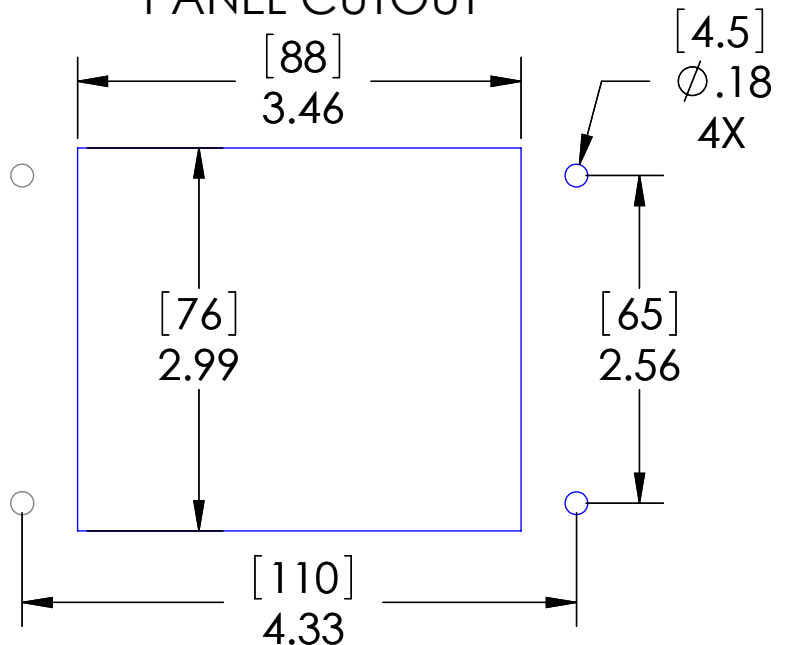

HOUSING MATERIALS	
BODY:	EPOXY COATED DIE CAST ALUMINUM
GASKET:	THERMOPLASTIC ELASTOMER
HANDLE:	POLYAMIDE
LEVERS:	STAINLESS STEEL

OPERATING TEMPERATURE: (-5°C / +50° C (+23° F / +122° F))

MOUNTING KIT ORDERED SEPARATELY CONTAINS M4X0.7 SS SCREW, NYLON WASHER, SPLIT LOCKWASHER AND M4 NUT
P/N: D-PIC-MT

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES AND [MM]

MATERIAL
FINISH
DO NOT SCALE DRAWING

PIC RATINGS/SPECIFICATIONS	
VOLTS:	250V
AMPS:	3A
SCCR:	0.2kA
NEMA/UL EN 60529:	4, 4X, 12 IP65
MOUNTING SCREW SIZE:	M4 (8-32) (304 or 316SS for 4X)
MOUNTING SCREW TORQUE:	1.2~1.8N-m (0.9~1.3 Lb-Ft)
INCOMING POWER WIRE SIZE:	0.5 ~ 4.0 sq mm / 20-12AWG
WIRE STRIP LENGTH:	10 ~ 11 mm

DRAWN BY:	DCG
DRAWN DATE:	08/09/2024
CHECKED BY:	DCG
CHECK DATE:	08/09/2024

MENCOM CORPORATION

TITLE:
FRENCH RCPT; DB9; USB-AA; R; 32

STANDARD CONFIGURATIONS UNLESS OTHERWISE NOTED		
CONN. TYPE	EXTERIOR	INTERIOR
ALL D-SUBS	FEMALE	MALE

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

SIZE	DWG. NO.	REV
B	DFR-DB9-USB-AFAF-R-32	B
SCALE: 2:3	WEIGHT:	SHEET 1 OF 1