


9 PIN FEMALE D-SUB IS CONNECTED TO A THREE PIN PLUGGABLE TERMINAL BLOCK FOR BLUE HOSE APPLICATION

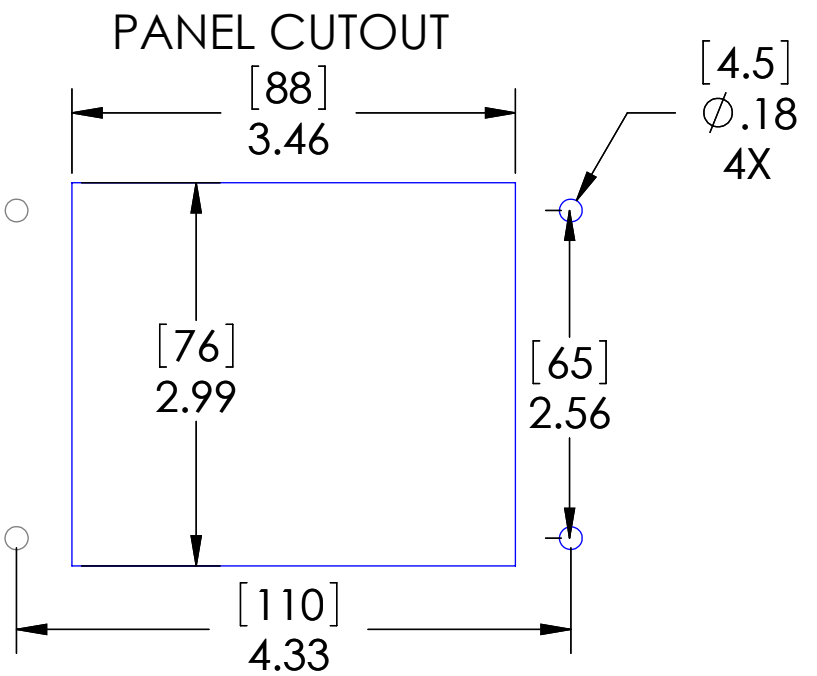

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

HOUSING MATERIALS		PIC RATINGS/SPECIFICATIONS	
BODY:	EPOXY COATED DIE CAST ALUMINUM	VOLTS:	125V
GASKET:	THERMOPLASTIC ELASTOMER	AMPS:	3A
HANDLE:	POLYAMIDE	SCCR:	0.2kA
LEVERS:	STAINLESS STEEL	NEMA/UL EN 60529:	4, 4X, 12 IP65
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MM]		MOUNTING SCREW SIZE:	M4 (8-32) (304 or 316SS for 4X)
		MOUNTING SCREW TORQUE:	1.2~1.8N-m (0.9~1.3 Lb-Ft)
		INCOMING POWER WIRE SIZE:	0.5 ~ 4.0 sq mm / 20-12AWG
		WIRE STRIP LENGTH:	10 ~ 11 mm
MATERIAL		DRAWN BY	DCG
		DRAWN DATE	04/15/2019
		CHECKED BY	DCG
		CHECK DATE	04/15/2019
FINISH		MENCOM CORPORATION	
		TITLE:	
		DUPX;9 PIN BL-HO;RJ 8 WR;3A	
		SIZE	DWG. NO.
DO NOT SCALE DRAWING		B	DHDP-DB9-RJ45-R-32
		SCALE: 2:3	WEIGHT:
		SHEET 1 OF 1	
		REV F	

STANDARD CONFIGURATIONS UNLESS OTHERWISE NOTED		
CONN. TYPE	EXTERIOR	INTERIOR
RJ45	CAT. 6 JACK	CAT. 6 JACK

MOUNTING KIT ORDERED SEPARATELY CONTAINS M4X0.7 SS SCREW, NYLON WASHER, SPLIT LOCKWASHER AND M4 NUT
P/N: D-PIC-MT



PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.