



—FEMALE 9 PIN D-SUB & 8 PIN MINI DIN CONFIGURED IN PARALLEL FOR BLUE HOSE APPLICATION. BOTH CONNECTORS ARE WIRED TO A 3 PIN PLUGGABLE TERMINAL BLOCK.

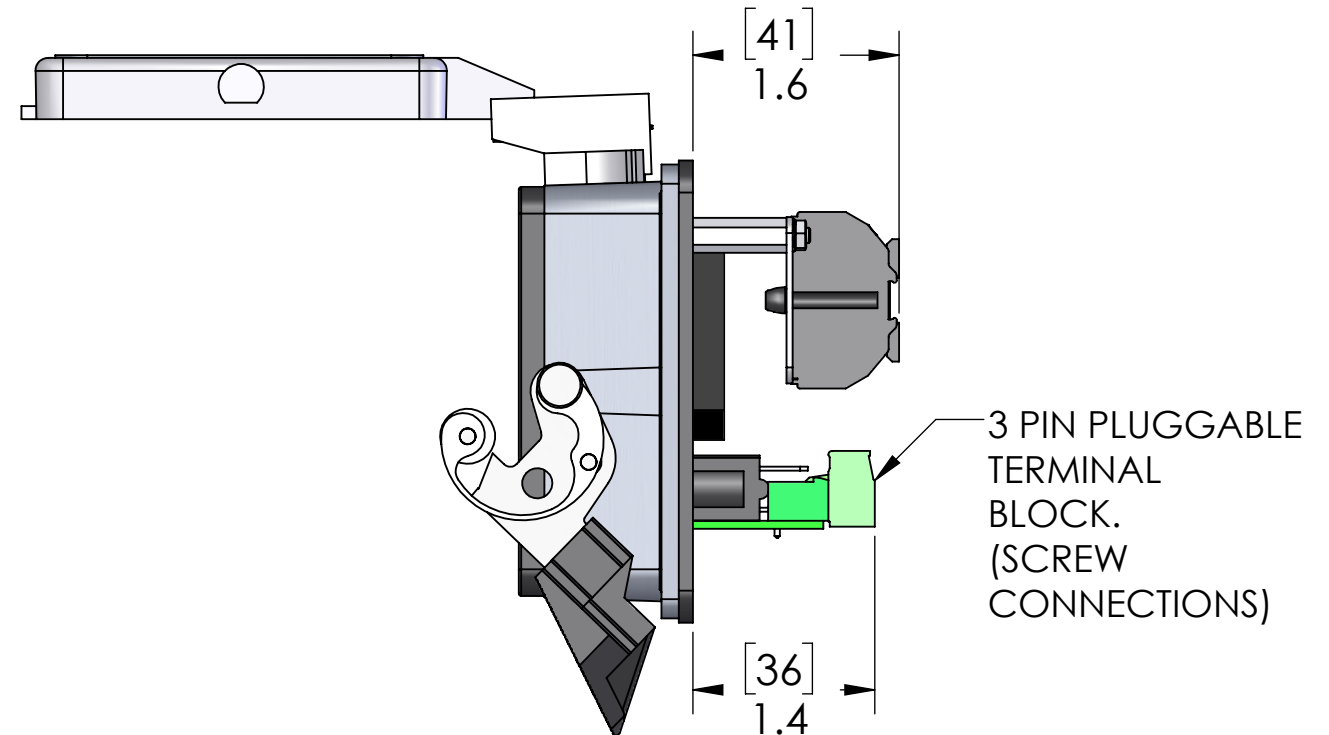

PANEL CUTOUT

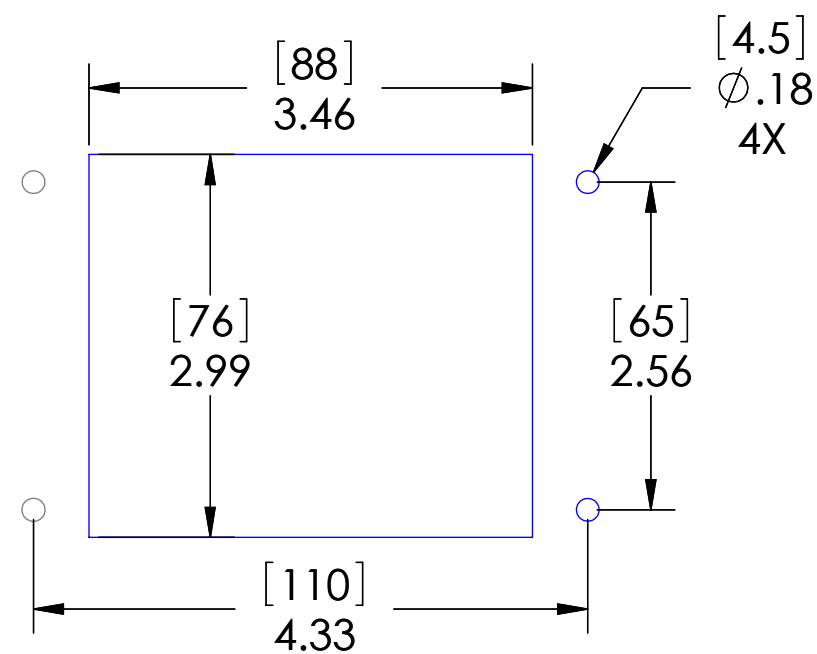

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

PIC RATINGS/SPECIFICATIONS	
VOLTS:	125V
AMPS:	3A
SCCR:	0.2kA
NEMA/UL EN 60529:	4, 4X, 12 IP65
MOUNTING SCREW SIZE:	M4 (8-32) (304 or 316SS for 4X)
MOUNTING SCREW TORQUE:	1.2~1.8N-m (0.9~1.3 Lb-Ft)
INCOMING POWER WIRE SIZE:	0.5 ~ 4.0 sq mm / 20-12AWG
WIRE STRIP LENGTH:	10 ~ 11 mm

HOUSING MATERIALS	
BODY:	EPOXY COATED DIE CAST ALUMINUM
GASKET:	THERMOPLASTIC ELASTOMER
HANDLE:	POLYAMIDE
LEVERS:	STAINLESS STEEL

MOUNTING KIT ORDERED
SEPARATELY CONTAINS
M4x0.7 SS SCREW, NYLON WASHER,
SPLIT LOCKWASHER AND M4 NUT
P/N: D-PIC-MT



UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
AND [MM]

D:	DRAWN BY	DCG
	DRAWN DATE	11/26/2018
	CHECKED BY	GO
	CHECK DATE	11/26/2018

COMMENTS:

MENCOM CORPORATION			
TITLE: GFI; 8 & 9 D-HWY(BL+HO); 3A			
SIZE B	DWG. NO. DHGF-DB9-8M-R-32		REV C
SCALE: 2:3	WEIGHT:	SHEET 1 OF 1	

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

		MATERIAL
		FINISH
		DO NOT SCALE DRAWING