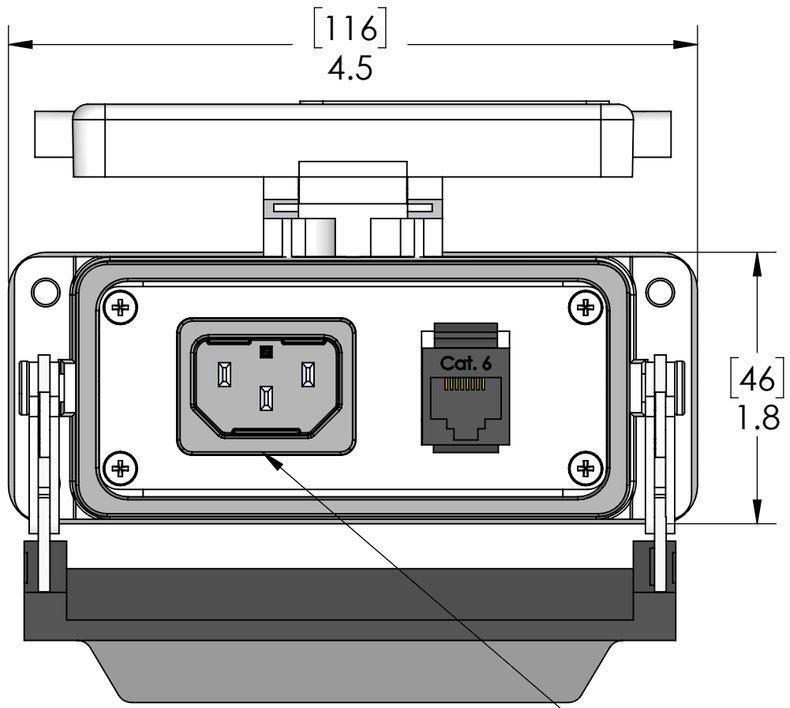


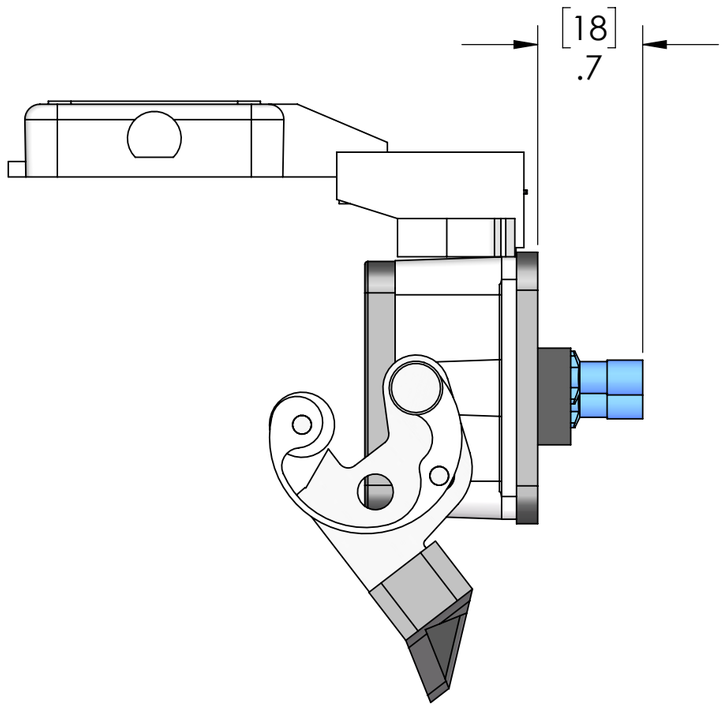


**MALE IEC TO BE USED ONLY FOR SUPPLYING POWER INTO ENCLOSURE**

## PANEL CUTOUT

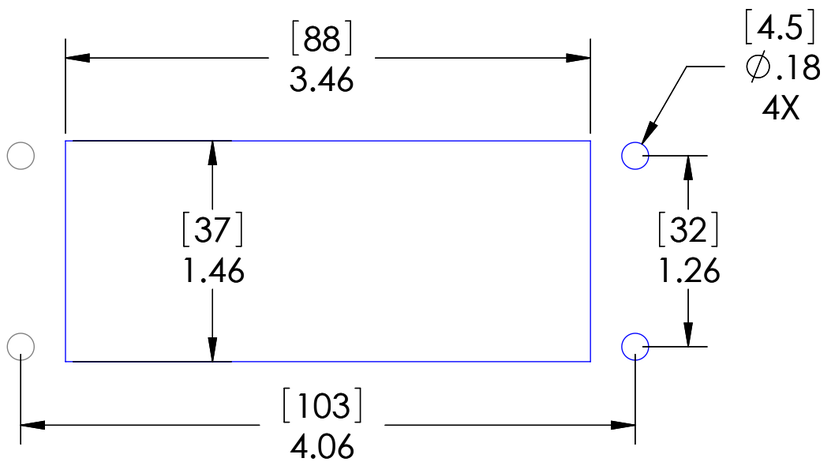


| STANDARD CONFIGURATIONS UNLESS OTHERWISE NOTED | | |
|---|---|---|
| CONN. TYPE | EXTERIOR | INTERIOR |
| RJ45 | CAT 6 JACK | CAT 6 JACK |

MOUNTING KIT ORDERED SEPARATELY CONTAINS M4x0.7 SS SCREW, NYLON WASHER, SPLIT LOCKWASHER AND M4 NUT

**P/N: D-PIC-MT**

**PROPRIETARY AND CONFIDENTIAL**

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

| HOUSING MATERIALS | |
|---|---|
| BODY: | EPOXY COATED DIE CAST ALUMINUM |
| GASKET: | THERMOPLASTIC ELASTOMER |
| HANDLE: | POLYAMIDE |
| LEVERS: | STAINLESS STEEL |

| PIC RATINGS/SPECIFICATIONS | |
|---|---|
| VOLTS: | 250V |
| AMPS: | 15A |
| NEMA/UL \| EN 60529: | 4, 4X, 12 \| IP65 |
| MOUNTING SCREW SIZE: | M4 (8-32) (304 or 316SS for 4X) |
| MOUNTING SCREW TORQUE: | 1.2~1.8N-m (0.9~1.3 Lb-Ft) |
| INCOMING POWER WIRE SIZE: | 0.5 ~ 4.0 sq mm / 20-12AWG |
| WIRE STRIP LENGTH: | 10 ~ 11 mm |

c UL us LISTED ENCL. ACC. 5JR2

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES AND [MM]

MATERIAL

FINISH

DO NOT SCALE DRAWING

| | |
|---|---|
| DRAWN BY | DCG |
| DRAWN DATE | 08/04/2020 |
| CHECKED BY | DCG |
| CHECK DATE | 08/05/2020 |

COMMENTS:

MENCOM CORPORATION

TITLE:

MALE IEC; RJ45; 16

| SIZE | DWG. NO. | REV |
|---|---|---|
| B | DMC-RJ45-16 | C |

SCALE: 1:1 | WEIGHT: | SHEET 1 OF 1