


**— MALE IEC TO BE USED ONLY FOR SUPPLYING POWER INTO ENCLOSURE**

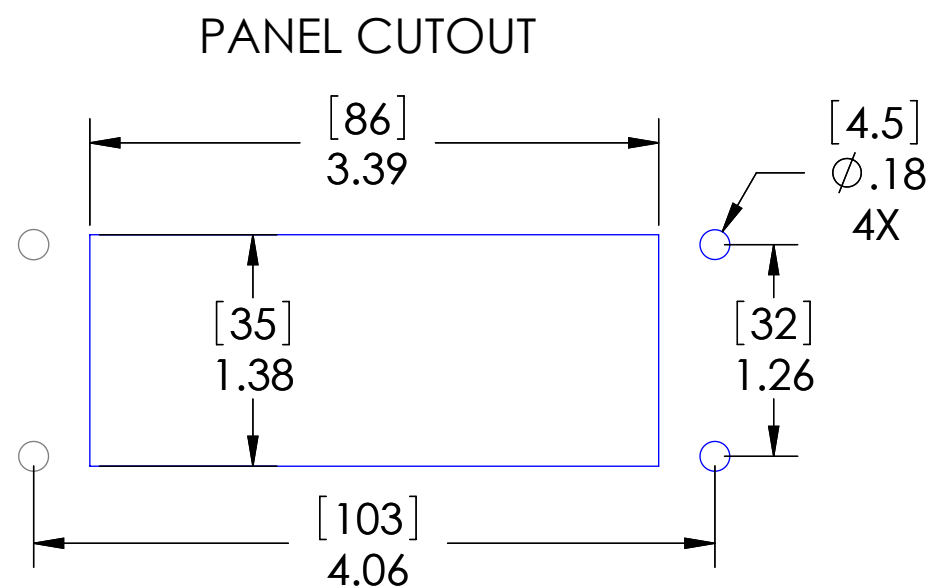

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

HOUSING MATERIALS	
BODY:	EPOXY COATED DIE CAST ALUMINUM
GASKET:	THERMOPLASTIC ELASTOMER
HANDLE:	POLYAMIDE
LEVERS:	STAINLESS STEEL

MOUNTING KIT ORDERED  
SEPARATELY CONTAINS  
M4x0.7 SS SCREW, NYLON WASHER,  
SPLIT LOCKWASHER AND M4 NUT  
**P/N: D-PIC-MT**



UNLESS OTHERWISE SPECIFIED:

**IS** DIMENSIONS ARE IN INCHES  
AND [MM]

PIC RATINGS/SPECIFICATIONS	
VOLTS:	250V
AMPS:	3A
SCCR:	0.2kA
NEMA/UL   EN 60529:	4, 4X, 12   IP65
MOUNTING SCREW SIZE:	M4 (8-32) (304 or 316SS for 4X)
MOUNTING SCREW TORQUE:	1.2~1.8N·m (0.9~1.3 Lb·Ft)
INCOMING POWER WIRE SIZE:	0.5 ~ 4.0 sq mm / 20-12AWG
WIRE STRIP LENGTH:	10 ~ 11 mm

ID:	DRAWN BY	DCG	<div>MENCOM CORPORATION</div> <div>TITLE:</div> <div>CC; IECM; RJ45; 3A; 16</div>
	DRAWN DATE	08/05/2020	
	CHECKED BY	DCG	
	CHECK DATE	12/21/2018	

STANDARD CONFIGURATIONS UNLESS OTHERWISE NOTED		
CONN. TYPE	EXTERIOR	INTERIOR
RJ45	CAT. 6 JACK	CAT. 6 JACK

**PROPRIETARY AND CONFIDENTIAL**

THE INFORMATION CONTAINED IN THIS  
DRAWING IS THE SOLE PROPERTY OF  
MENCOM CORPORATION. ANY  
REPRODUCTION IN PART OR AS A WHOLE  
WITHOUT THE WRITTEN PERMISSION OF  
MENCOM CORPORATION IS  
PROHIBITED.

		MATERIAL
		FINISH
		DO NOT SCALE DRAWING

COMMENTS:	SIZE	DWG. NO.	REV
	<b>B</b>	DMC-RJ45-R-16	<b>B</b>
	SCALE: 7:8	WEIGHT:	SHEET 1 OF 1