


– 15 PIN HI DENSITY D-SUB CONFIGURED
FEMALE EXTERIOR /MALE INTERIOR

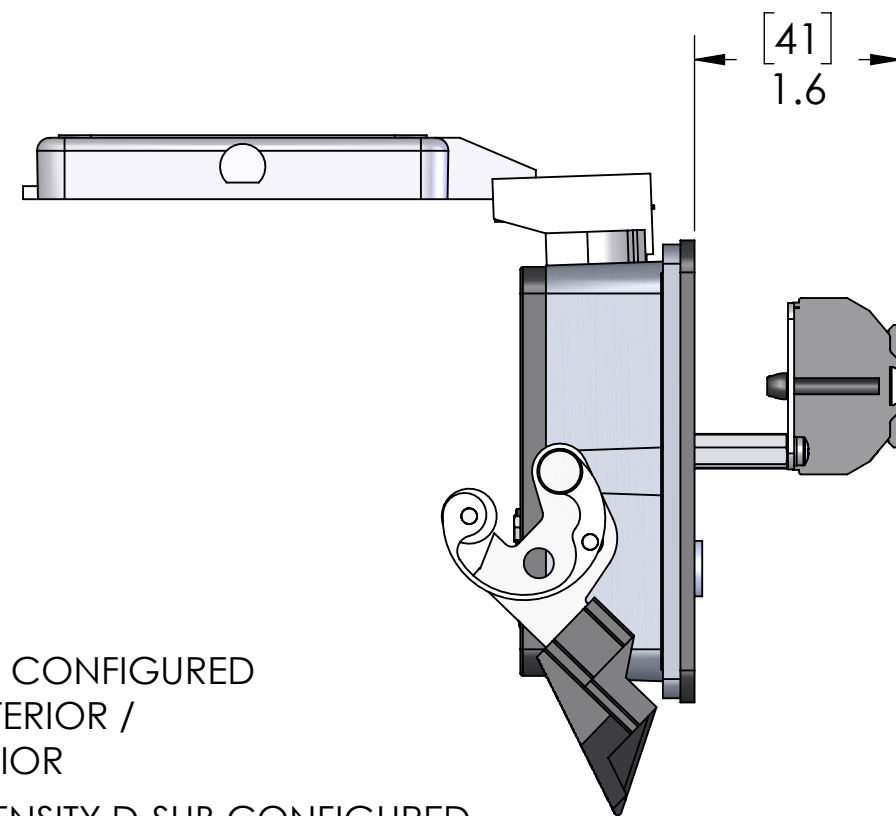

Technical drawing of a rectangular plate with dimensions and hole locations. The plate has a width of 3.46 (labeled [88]) and a height of 2.99 (labeled [76]). There are four holes, each with a diameter of $\phi .18$ (labeled 4X). The holes are located at the corners of the plate. The horizontal distance from the left edge to the center of the right holes is 4.33 (labeled [110]). The vertical distance from the bottom edge to the center of the top holes is 2.56 (labeled [65]).

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

HOUSING MATERIALS	
BODY:	EPOXY COATED DIE CAST ALUMINUM
GASKET:	THERMOPLASTIC ELASTOMER
HANDLE:	POLYAMIDE
LEVERS:	STAINLESS STEEL

UL
LISTED
ENCL. ACC.
5JR2

DRAWN BY	DCG
DRAWN DATE	03/15/2019
CHECKED BY	GO
CHECK DATE	03/15/2019

TITLE:

CC: DPLX; DB9; DDB15; 6M; 32

DO NOT SCALE DRAWING

SIZE B	DWG. NO. DP-DB9-DDB15-6M-32	REV B
SCALE: 2:3	WEIGHT:	SHEET 1 OF 1