
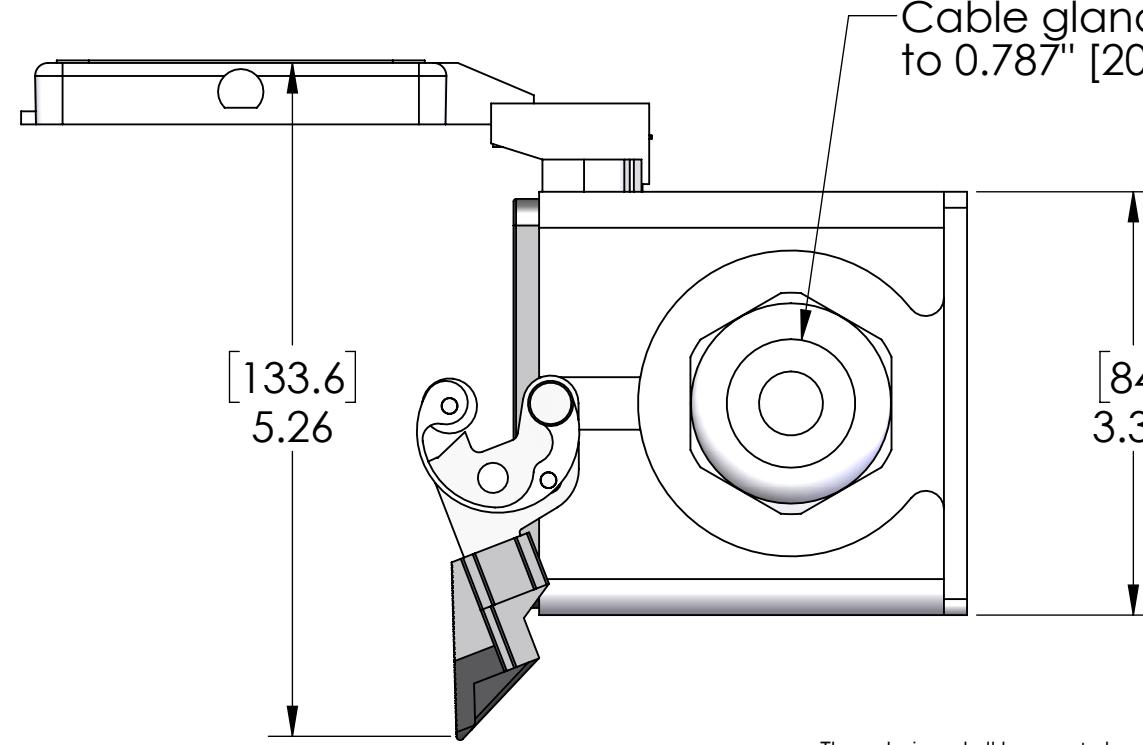


D

D

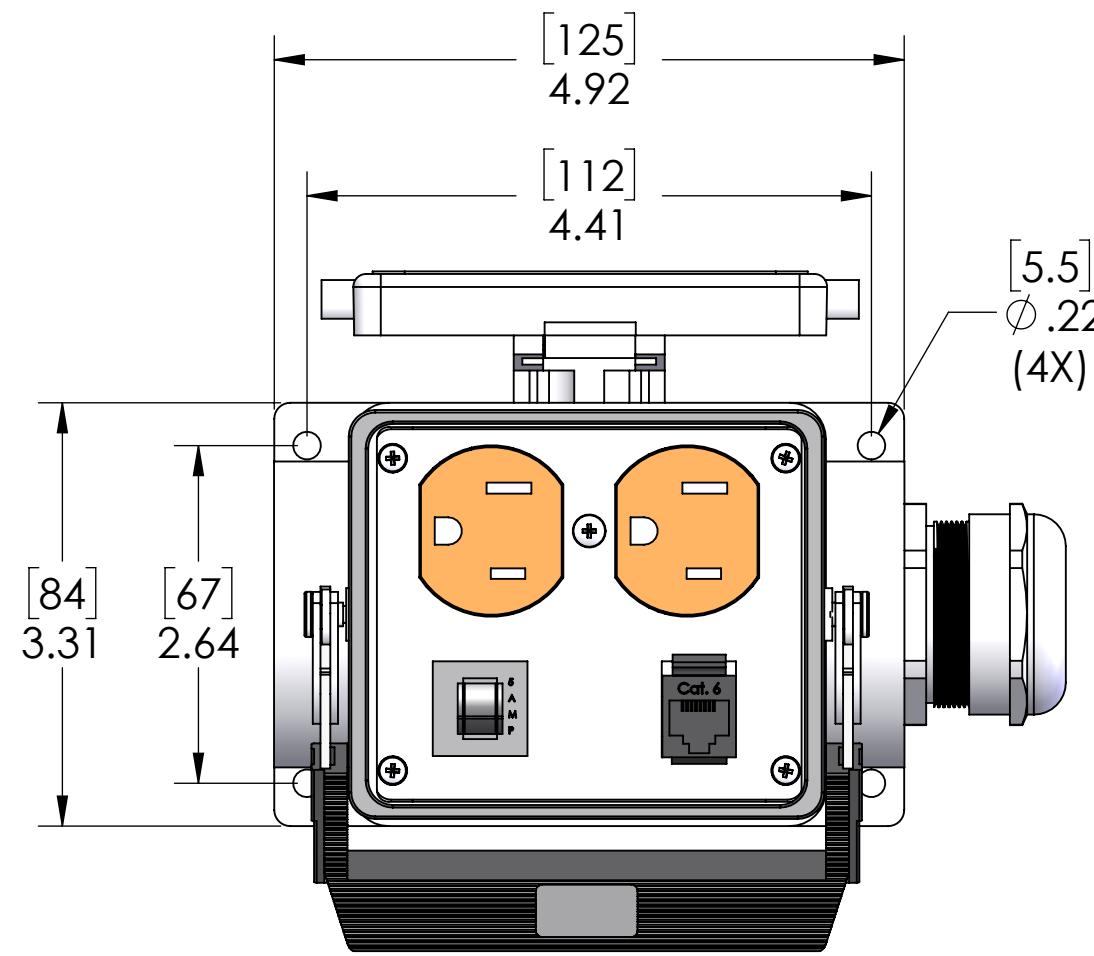

Cable gland for 0.475" [12] to 0.787" [20] cable.

C

C

B

B

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

PIC RATINGS/SPECIFICATIONS

VOLTS:	125V
AMPS:	5A
SCCR:	0.2kA
NEMA/UL EN 60529:	4, 4X, 12 IP65
MOUNTING SCREW SIZE:	M4 (8-32) (304 or 316SS for 4X)
MOUNTING SCREW TORQUE:	1.2~1.8N-m (0.9~1.3 Lb-Ft)
INCOMING POWER WIRE SIZE:	0.5 ~ 4.0 sq mm / 20-12AWG
WIRE STRIP LENGTH:	10 ~ 11 mm

OPERATING TEMPERATURE: (-10°C / +60°C (+14°F / +140°F))

MOUNTING KIT ORDERED
SEPARATELY CONTAINS
M5x0.8 SS SCREW, NYLON WASHER,
SPLIT LOCKWASHER AND M5 NUT
P/N: D-PIC-MT-M5



UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
AND [MM]

DRAWN BY DG
DRAWN DATE 07/08/2021

CHECKED BY DCG
CHECK DATE 07/08/2021

MENCOM CORPORATION

TITLE:

DPLX; RJ45; 5R; P32

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

MATERIAL
FINISH
DO NOT SCALE DRAWING

SIZE B	DWG. NO. DP-RJ45-5R-P32	REV C
SCALE: 2:3	WEIGHT:	SHEET 1 OF 1

STANDARD CONFIGURATIONS UNLESS OTHERWISE NOTED		
CONN. TYPE	EXTERIOR	INTERIOR
RJ45	CAT 6 JACK	CAT 6 JACK