

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

PIC RATINGS/SPECIFICATIONS	
VOLTS:	125V
AMPS:	3A
SCCR:	0.2kA
NEMA/UL EN 60529:	4, 4X, 12 IP65
MOUNTING SCREW SIZE:	M4 (8-32) (304 or 316SS for 4X)
MOUNTING SCREW TORQUE:	1.2~1.8N-m (0.9~1.3 Lb-Ft)
INCOMING POWER WIRE SIZE:	0.5 ~ 4.0 sq mm / 20-12AWG
WIRE STRIP LENGTH:	10 ~ 11 mm

HOUSING MATERIALS	
BODY:	EPOXY COATED DIE CAST ALUMINUM
GASKET:	THERMOPLASTIC ELASTOMER
HANDLE:	POLYAMIDE
LEVERS:	STAINLESS STEEL

UNLESS OTHERWISE SPECIFIED:	
DRAWN BY	DCG
DRAWN DATE	03/11/2019
CHECKED BY	DCG
CHECK DATE	03/11/2019

MENCOM CORPORATION

TITLE:
DPLX; RJ45; 3A; 32

SIZE **B** DWG. NO. **DP-RJ45-R-32** REV **D**

SCALE: 2:3 WEIGHT: SHEET 1 OF 2

MOUNTING KIT ORDERED SEPARATELY CONTAINS M4x0.7 SS SCREW, NYLON WASHER, SPLIT LOCKWASHER AND M4 NUT
P/N: D-PIC-MT



DIMENSIONS ARE IN INCHES AND [MM]

DO NOT SCALE DRAWING

STANDARD CONFIGURATIONS UNLESS OTHERWISE NOTED		
CONN. TYPE	EXTERIOR	INTERIOR
RJ45	CAT. 6 JACK	CAT. 6 JACK

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

8 7 6 5 4 3 2 1

D

D

C






C

B

B

A

A

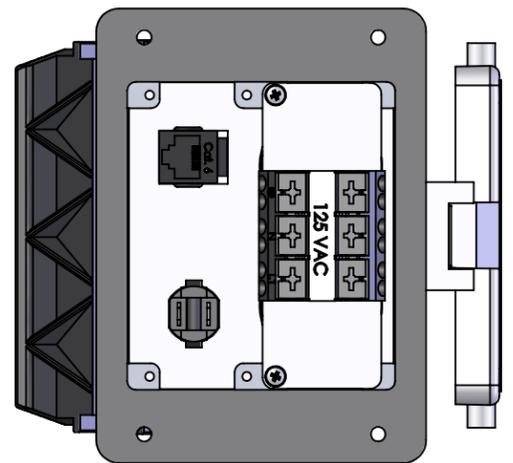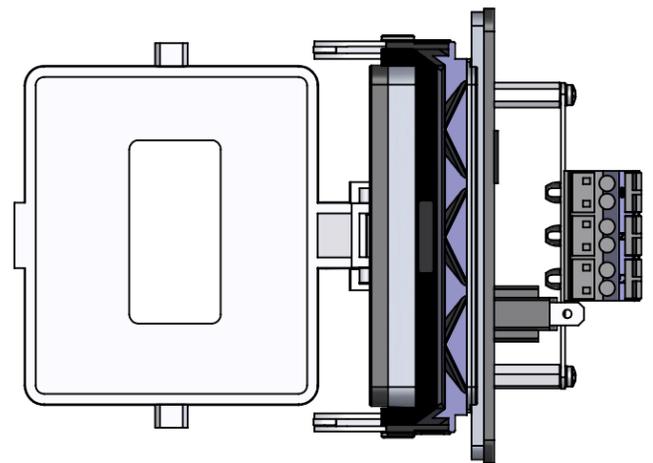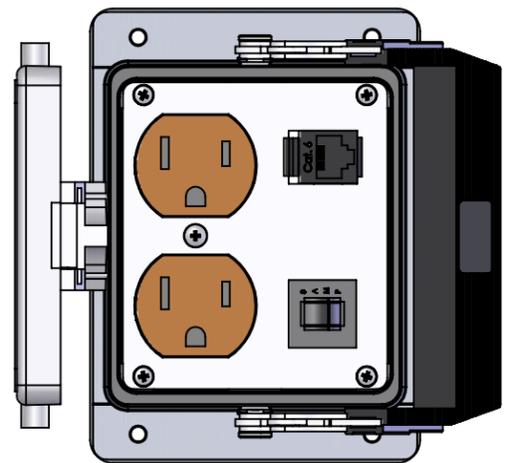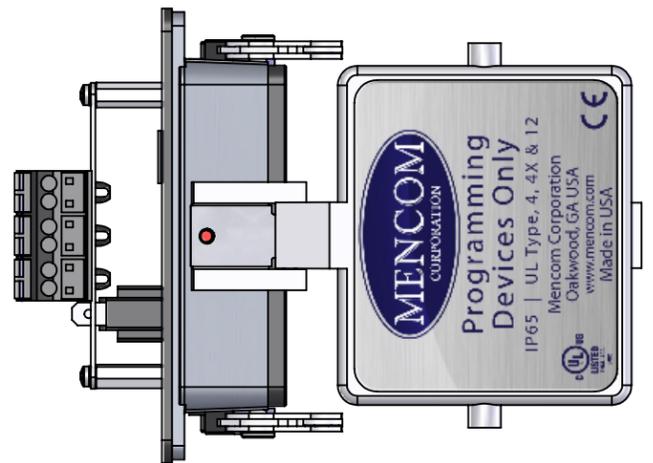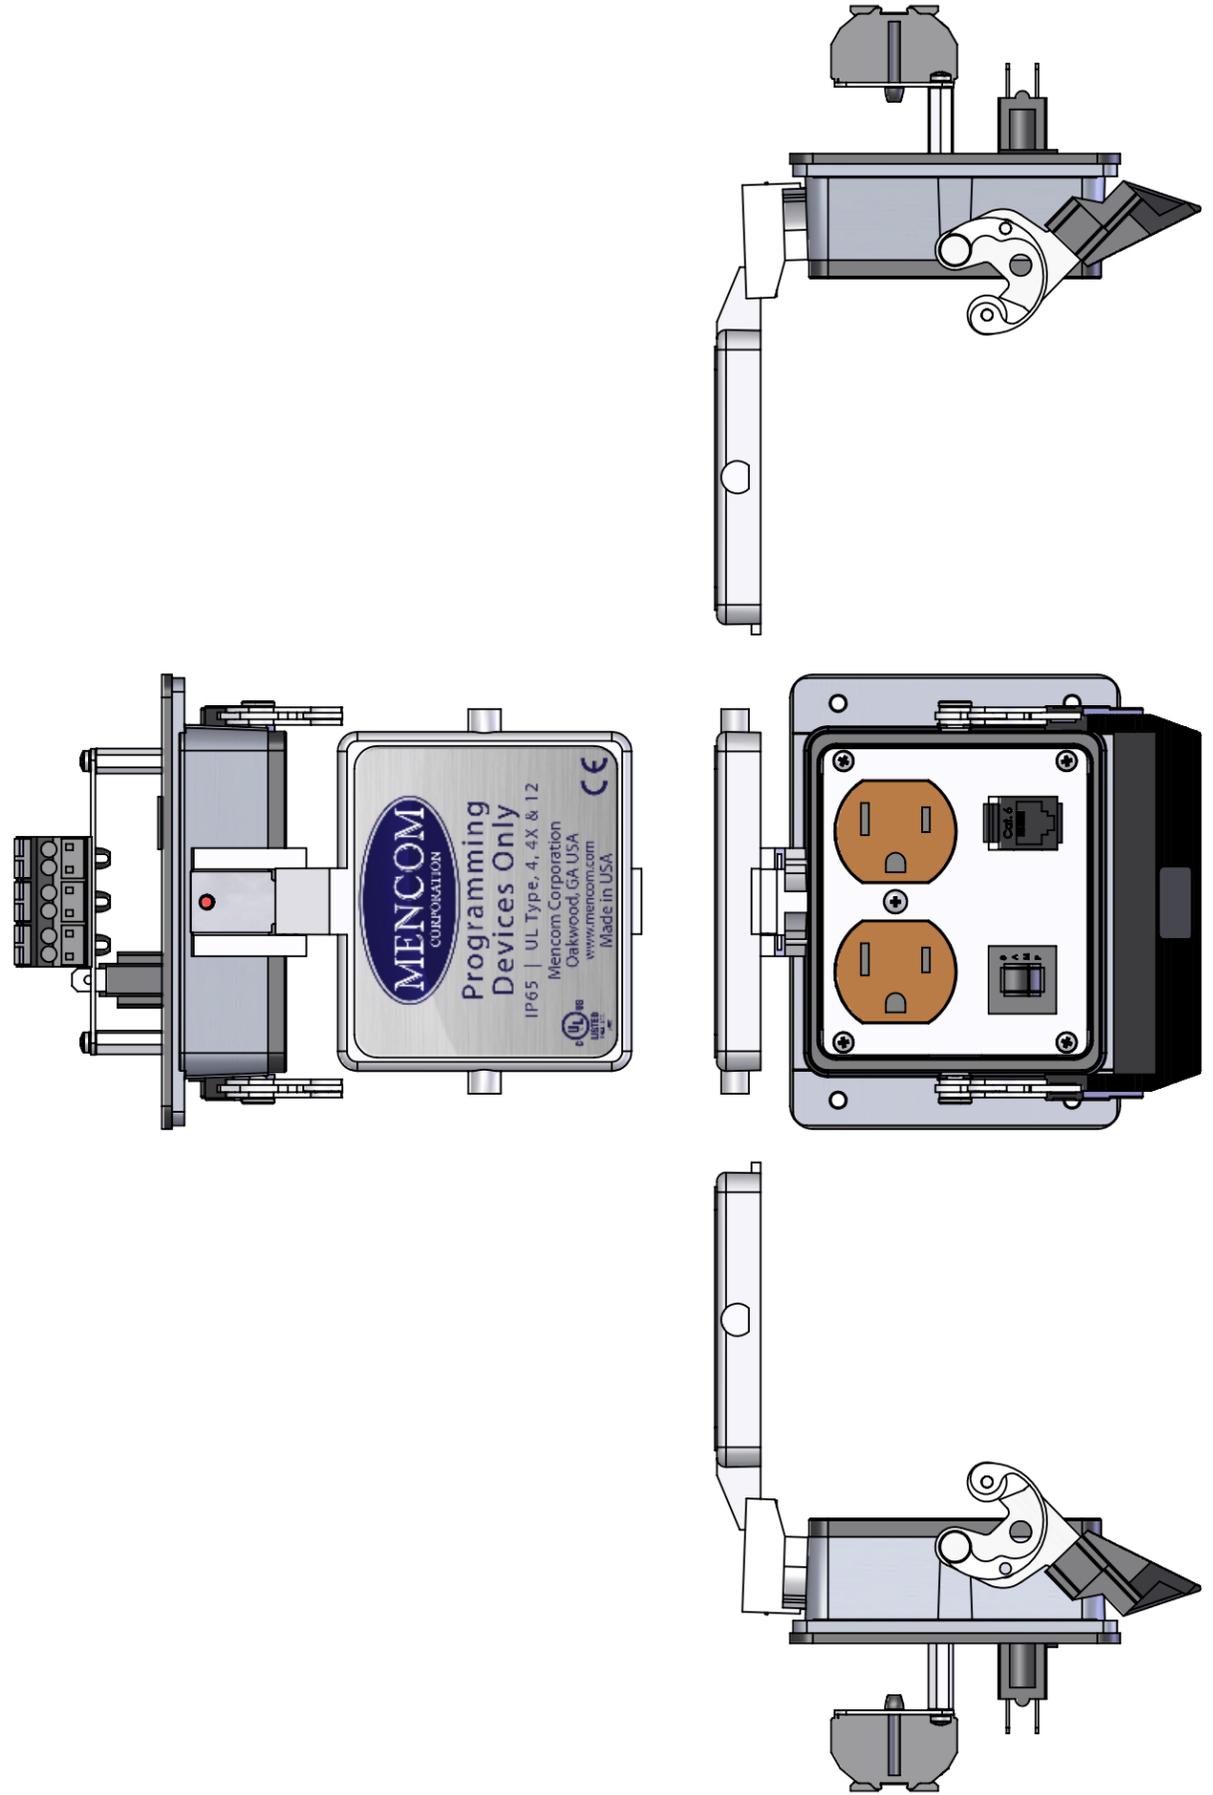

DRAWN BY	DCG	MENCOM CORPORATION	
DRAWN DATE	03/11/2019		
CHECKED BY	DCG		
CHECK DATE	03/11/2019		
COMMENTS:		TITLE:	
		DPLX; RJ45; 3A; 32	
SIZE	DWG. NO.	REV	
B	DP-RJ45-R-32	D	
SCALE: 2:3	WEIGHT:	SHEET 2 OF 2	

8 7 6 5 4 3 2 1